

Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as Spectrum Analyzers, Signal Generators, Oscilloscopes, Power Meters, Network Analyzers etc from all the major suppliers such as Keysight, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. We fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 1 year warranty. Our staff have extensive backgrounds in T&M which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, presenting flexible technical + commercial solutions and supplying a loan unit during warranty repair, if available.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based in at Oakley, Bedfordshire in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our 40GHz in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test Equipment Solutions Ltd
Unit 3 Highfield Court
Highfield Road
Oakley
Bedfordshire
MK43 7TA

Telephone: 01183 800 800

Email: info@TestEquipmentHQ.com
Web: www.TestEquipmentHQ.com



MT8820C

Radio Communication Analyzer

30 MHz to 2.7 GHz (3.4 GHz to 3.8 GHz)





All in 1 Unit for Basic Tx and Rx Measurements of LTE (FDD/TDD) LTE-Advanced (FDD), W-CDMA/HSPA/HSPA Evolution/DC-HSDPA, GSM/GPRS/EGPRS, CDMA2000 1X/1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA Systems

Supports Multi-communication Systems

The MT8820C Radio Communication Analyzer platform covers a frequency range of 30 MHz to 2.7 GHz (3.4 GHz to 3.8 GHz: with MT8820C-018).

When the dedicated optional measurement software and hardware is installed, the major Tx and Rx characteristics of LTE (FDD/TDD), LTE-Advanced (FDD), W-CDMA/HSPA/HSPA Evolution/DC-HSDPA, GSM/GPRS/EGPRS, CDMA2000 1X, CDMA2000 1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA terminals can be measured using a single MT8820C unit.

Advanced Digital Signal Processing and Batch Measurement

Manufacturing and inspection test times have been dramatically cut by incorporating advanced DSP and parallel measurement technologies. Furthermore, several measurement items can be selected freely for batch measurement, and the number of measurements for each measurement item can be configured separately. The one-touch operation supports easy and quick measurement of Tx and Rx characteristics, including transmit frequency, modulation accuracy, transmit power, spectrum emission mask, adjacent channel leakage power ratio, occupied bandwidth, and BER.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

Parallelphone Measurement

When the Parallelphone Measurement option is installed in the MT8820C main frame, two different mobile terminals can be connected and tested simultaneously with a single MT8820C using its second RF, AF, GPIB, and Ethernet port. This functionality significantly improves manufacturing efficiency by reducing production costs (return on investment and energy saving) and space.

MT8820A/B Compatibility

All functions, performance, remote commands are backwards compatible with the MT8820A/B, so customers can easily retask control software and knowledge from the MT8820A/B.

Parallelphone™ is a registered trademark of Anritsu Corporation.

MT8820C

Radio Communication Analyzer

30 MHz to 2.7 GHz (3.4 GHz to 3.8 GHz: with MT8820C-018)




Supports Multi-communication Systems

All-in-one Support for Basic Tx and Rx Measurements of LTE (FDD/TDD), LTE-Advanced (FDD), W-CDMA/HSPA/HSPA Evolution/DC-HSDPA, GSM/GPRS/EGPRS, CDMA2000 1X/1xEV-DO Rev. A, PHS/Advanced PHS, and TD-SCDMA/HSPA Systems

LTE-Advanced FDD Measurement

Receiver Measurement

The LTE throughput can be measured by counting the number of ACK blocks from the LTE-Advanced FDD CA terminal. In addition, statistical analysis can be performed based on CQI values reported by the LTE-Advanced FDD CA terminal.

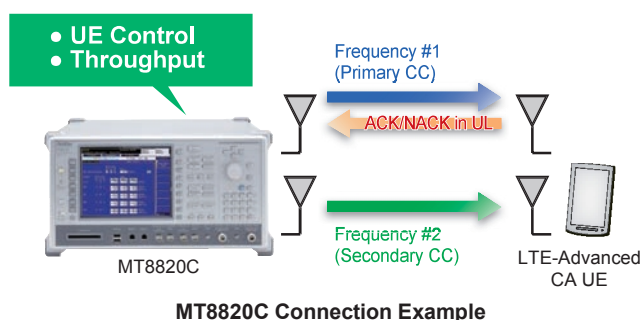

MT8820C Connection Example

MX882012C-021 LTE-Advanced FDD DL CA Measurement Software

MX882012C LTE Measurement Software

MX882010C Parallel Phone Software

MT8820C-008
LTE Measurement Hardware

MT8820C-008
LTE Measurement Hardware

MT8820C-012 Parallel Phone Measurement Hardware

MT8820C Main frame

Example of LTE-Advanced FDD DL CA (2CC, SISO) Options Stack (LTE-Advanced FDD)

LTE FDD/TDD Measurement

3GPP-compliant measurements of Tx characteristic of 3.9G LTE FDD/TDD terminals.

Transmitter Measurement


The transmit power, frequency error, occupied bandwidth, spectrum emission mask, adjacent channel leakage power ratio, modulation accuracy, and constellation can be measured. In addition, it supports Modulation Analysis with setting of PUSCH-EVM with exclusion period.



Transmitter Measurement (EVM)

Receiver Measurement

The LTE FDD/TDD throughput can be measured by counting the number of ACK blocks from the LTE FDD/TDD terminal. And statistical analysis can be performed on CQI values reported by the LTE FDD/TDD terminal.

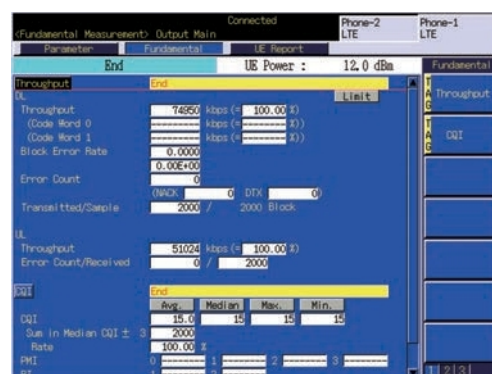

Receiver Measurement (LTE FDD)

- * CA: Carrier Aggregation
- * CC: Component Carrier
- * MT8820C-012, MT8820C-008 2 sets, MX882012C, and MX882000C-021 required for LTE-Advanced FDD DL CA measurements (MT8820C 1 unit). Refer to the MX882012C/13C/42C/43C catalog for detail.
- * For terminal connectivity, contact your Anritsu sales representative.

- * Requires MT8820C-008 and MX882012C (MX882013C) for the main Tx and Rx characteristics of LTE FDD/TDD terminal with Call Processing function.
- * Requires MX882042C (MX882043C) for the main Tx characteristics of LTE FDD/TDD terminal without Call Processing function. MX882042C (MX882043C) is non-Call Processing product. Refer to the MX882012C/13C/42C/43C catalog for detail.
- * For terminal connectivity, contact your Anritsu sales representative.

W-CDMA Measurement

3GPP-compliant measurements of Tx and Rx characteristics of 3G W-CDMA terminals.

Transmitter Measurement


The transmit power, frequency error, occupied bandwidth, spectrum emission mask, adjacent channel leakage power ratio, modulation accuracy, and peak code domain error can be measured.



Transmitter Measurement

Receiver Measurement

The Bit Error Rate (BER) can be measured using the 3GPP-compliant loopback test mode. In addition, feeding the demodulated data and clock signals from the W-CDMA terminal directly to the MT8820C supports bit error rate measurement. Both PN9 and PN15 can be set as the downlink RF signal data pattern.

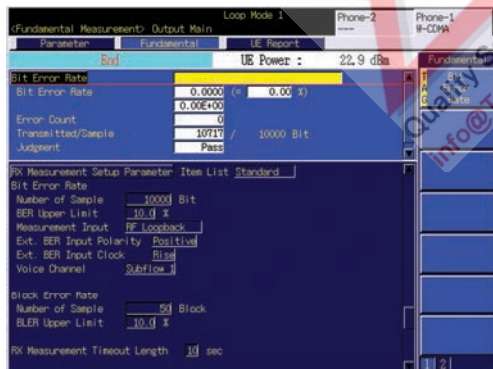

BER


* Requires MT8820C-001, MX882000C, and MX88205xC

HSPA Measurement

3GPP-compliant measurement of Tx and Rx characteristics of 3.5G HSPA (HSDPA/HSUPA) terminals is supported.

HSDPA Measurement

HSDPA call-processing functions, including Tx/Rx items, such as transmit power, spectrum emission mask, and adjacent channel leakage power ratio of the HS-DPCCH transmission slot are measured. At measurement in the time domain, the power step at the HS-DPCCH slot boundary, modulation, and code domain power are measured. Moreover, HSDPA throughput with 64QAM can be measured by counting the number of ACK blocks from the terminal.

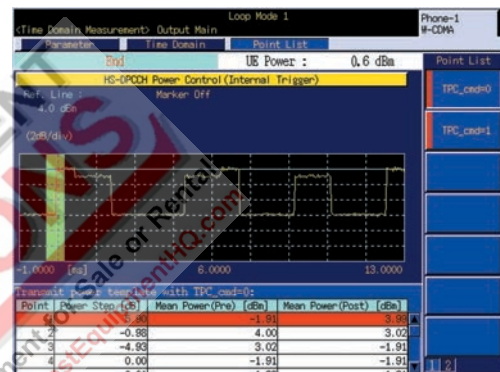

HS-DPCCH Measurement

HSUPA Measurement

HSUPA call-processing functions, including Tx/Rx items, such as transmit power, spectrum emission mask, and adjacent channel leakage power ratio at HS-DPCCH and E-DCH transmission are measured. Moreover, E-DCH throughput is calculated from the E-TFCI notification from the HSUPA terminals. In addition, the E-TFCI statistics (average, median, maximum and minimum) are displayed.



Transmitter Measurement

* MT8820C-001, MX882000C, MX882000C-011, and MX882050C required for HSDPA measurements
* MT8820C-001, MX882000C, MX882000C-011, MX882000C-021, and MX882050C required for HSUPA measurements


Refer to the MX882000C catalog for details.

HSPA Evolution Measurement

3GPP-compliant measurements of Tx and Rx characteristics, throughput and CQI of enhanced 3.5G HSPA Evolution terminals. FRC H-Set 8 (64QAM) and HS-DSCH Category 14 (21 Mbps class) test signals can be transmitted for HSPA Evolution throughput measurements.

Transmitter Measurement


At measurement in the time domain, mobile terminal relative code domain power accuracy for HS-DPCCH and E-DCH with 16QAM are measured.

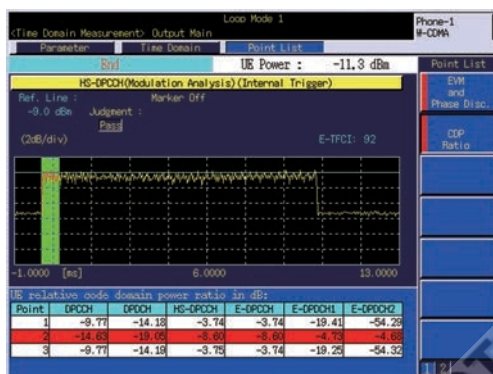

Code Domain Power

Receiver Measurement

The HSDPA throughput with 64QAM can be measured by counting the number of ACK blocks from the terminal.

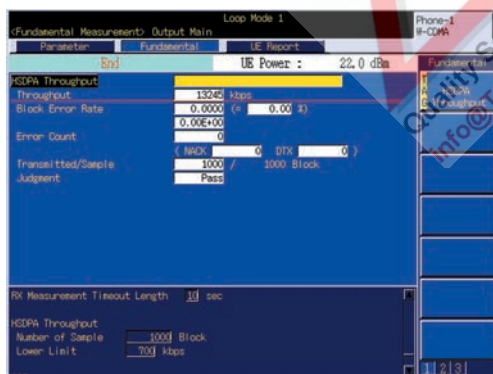

Throughput

DC-HSDPA Measurement

Measurement of key Rx characteristics, throughput and CQI is supported for 3GPP-compliant DC-HSDPA terminals.

Receiver Measurement


DC-HSDPA call processing can be measured using the two RF ports of the MT8820C. Moreover, the number of ACK blocks sent from the mobile terminal can be counted and two-cell throughput can be measured. Measurement of the highest throughput (42 Mbps) in HS-DSCH category 24 is supported.



Throughput



CQI

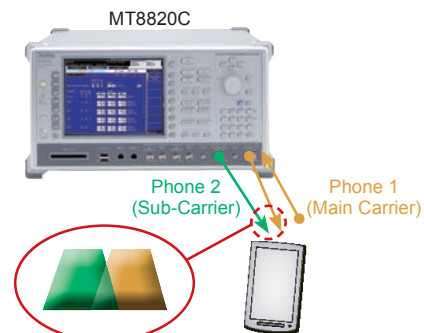

MT8820C Connection Example

- * Requires MT8820C-001, MX882000C, MX882000C-011, MX882000C-021, MX882000C-031, and MX882050C
- * For terminal connectivity, contact your Anritsu sales representative.


- * MT8820C-012, MT8820C-001 2 sets, MX882000C, MX882000C-011, MX882000C-021, MX882000C-031, MX882000C-032, MX882050C, and MX882010C required for DC-HSDPA measurements (MT8820C 1 unit)

GSM/GPRS Measurement

Measures Tx and Rx characteristics of GSM/GPRS terminals — world's most common digital mobile standard.

Transmitter Measurement

At GSM/GPRS measurement, the transmit frequency, phase error (RMS and peak), transmit power, power vs. time (template mask), and output RF spectrum can be measured.

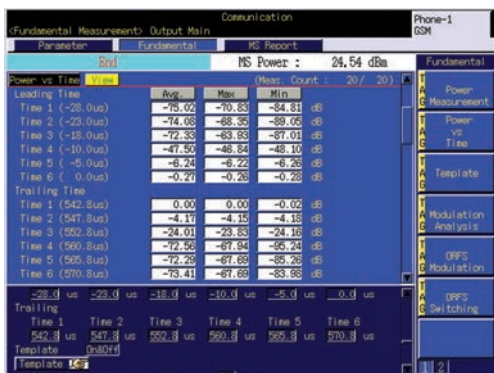

Power vs. Time (GSM)

EGPRS Measurement

Measures Tx and Rx characteristics of enhanced GPRS system (EGPRS) terminals.

Transmitter Measurement

At EGPRS measurement, the transmit frequency, EVM (RMS and peak), origin offset, transmit power, power vs. time (template mask), and output RF spectrum can be measured.



Burst Waveform Display (8PSK)

Receiver Measurement

The uplink RF signal, which is looped back from GSM terminal, is demodulated by controlling the GSM terminal in the loopback condition to measure the frame error, bit error, and CRC error rates. And FAST BER measurement is supported.

The block error rate can be measured with the BLER and Test Mode B connection by controlling the GPRS terminal in the loopback condition.

The above receiver measurements can be performed in parallel with transmitter measurements.



BER (GSM)

Receiver Measurement

The uplink RF signal, which is looped back from EGPRS terminal, is demodulated by controlling the EGPRS terminal in the loopback condition to measure the block error or bit error.

The above receiver measurements can be performed in parallel with transmitter measurements.



BER (SRB Loopback)

* Requires MT8820C-002 and MX882001C

* Requires MT8820C-002, MX882001C, and MX882000C-011

Refer to the MX882001C catalog for details.

CDMA2000 1X Measurement

3GPP2-compliant measurements of Tx and Rx characteristics of 3G CDMA2000 1X terminals.

Transmitter Measurement


The transmit power, modulation analysis, occupied bandwidth, code domain power, spurious emission, and access probe power can be measured.



Modulation Analysis

Receiver Measurement

The Frame Error Rate (FER) and Pass/Fail evaluation can be performed in SO2, SO9, SO55 and SO32 (TDSO) to display the FER, error frame count, Tx frame count, confidence level, and Pass/Fail results.

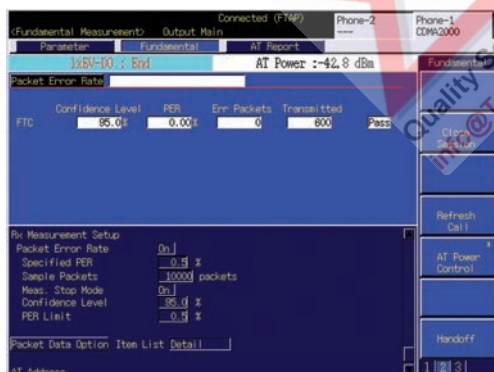

FER

* Requires MT8820C-003 and MX882002C

CDMA2000 1xEV-DO Rev. 0/Rev. A Measurement


3GPP2-compliant measurements of Tx and Rx characteristics of 3.5G 1xEV-DO Rev. 0/Rev. A terminals.

Measurement Software and Protocol Revision

Model	Protocol Revision
MX882006C	IS-856-0 (1xEV-DO Rev. 0)
MX882006C-002	IS-856-0 (1xEV-DO Rev. 0)
MX882006C-011	IS-856-A (1xEV-DO Rev. A)

Transmitter Measurement


The transmit power, modulation analysis, occupied bandwidth, code domain power, spurious emission, and access probe power can be measured.

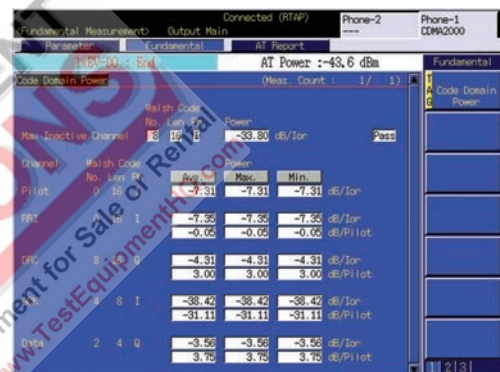

Code Domain Power

Receiver Measurement

Packet Error Rate (PER) measurement and Pass/Fail evaluation can be performed in FTAP to display the PER, error packet count, transmission packet count, confidence level, and Pass/Fail results.

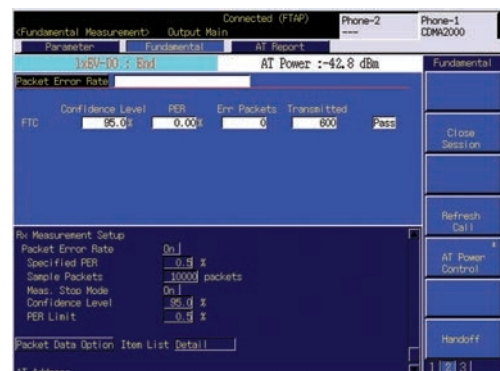

PER

* Requires MT8820C-003, MT8820C-005, MX882002C, and MX882006C
 * Installing the MT8820C-003, MT8820C-005, MX882002C, MX882006C, and MX882006C-011 can measure of Tx and Rx characteristics of 1xEV-DO Rev. A terminal.


Refer to the MX882002C/MX882006C catalog for details.

TD-SCDMA Measurement

3GPP-compliant measurements of the main Tx and Rx characteristics of 3G TD-SCDMA (1.28 Mcps TDD) and 3.5G HSDPA/HSUPA mobile terminals is supported.

Transmitter and Receiver Measurement

3GPP-compliant measurement of TD-SCDMA with call-processing functions, including Tx/Rx items such as transmit power, power template, frequency error, occupied bandwidth, spectrum emission mask, adjacent channel leakage power ratio, modulation accuracy, peak code domain error, open loop power control, closed loop power control, out-of-sync handling, BER, and BLER, is supported. In addition, one-touch setting of main Tx/Rx test items and closed loop power control offer easy configuration of automated 3GPP-compliant test systems.

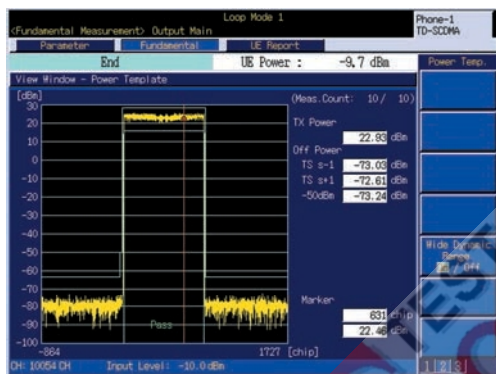

Power Template

TD-SCDMA HSDPA Measurement

3GPP-compliant Throughput, and CQI measurements of TD-SCDMA HSDPA terminals are supported. The signals for Throughput measurement include RMC signals for all TD-SCDMA HS-DSCH categories as well as maximum category-15 data rates (2.8 Mbps).

TD-SCDMA HSUPA Measurement

3GPP-compliant Tx measurement and Performance test of TD-SCDMA HSUPA with call-processing are measured. The signals for Tx measurement include HSUPA RMC category 1 to 6 (2.23 Mbps UE class) terminals can be transmitted. And, HSUPA performance measurement is calculated the information about bit rate by detecting E-DCH TB (Transport Block size). Index include E-UCCH sent from the mobile terminal to MT8820C.

* Requires MT8820C-001, MT8820C-007, and MX882007C for TD-SCDMA measurements.

Requires MT8820C-001, MT8820C-007, MX882007C, and MX882007C-011 for TD-SCDMA HSDPA measurements.
Requires MT8820C-001, MT8820C-007, MX882007C, MX882007C-011, and MX882007C-021 for TD-SCDMA HSUPA measurements.

* For terminal connectivity, contact your Anritsu sales representative.

Refer to the MX882007C catalog for details.

PHS/Advanced PHS Measurement

Measures Tx and Rx characteristics of PHS terminals/Advanced PHS terminals and base stations in compliance with ARIB RCR-STD-28 edition 5.0 supporting $\pi/4$ DQPSK, 8PSK, and 16QAM modulation methods.

Transmitter Measurement

The transmit frequency, modulation accuracy, transmit power, transmission rate, occupied bandwidth, adjacent channel leakage power of PHS terminals/Advanced PHS terminals and base stations are measured simultaneously.



Adjacent Channel Power

Receiver Measurement

The bit error rate can be measured on receipt of demodulation data and clocks output from a terminal/base station by controlling the terminal/base station with an external PC. This measurement can be performed in parallel with transmitter measurements.



BER (8PSK)

* Requires MT8820C-002 and MX882005C for PHS measurements.
Requires MT8820C-002, MX882005C, and MX882005C-011 for Advanced PHS measurements.

Refer to the MX882005C catalog for details.


Supports All Function Tests

Real-time Voice Encoding and Decoding

Voice tests with a handset are supported by the real-time voice encoding and decoding function of the W-CDMA (GSM, CDMA2000 1X, TD-SCDMA) Measurement Software. In addition, the call Tx and Rx audio can be measured using the audio measurement function.


End-to-End Communications Test

This supports the end-to-end communications test between an Anritsu handset (A0058A/A0013) connected to the RJ11 connector on the MT8820C and a mobile terminal.

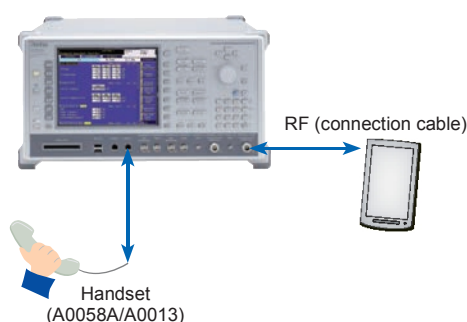

Audio Transmitter and Receiver Measurement

The tone signal from the MT8820C AF Output connector is supplied to the microphone of the mobile terminal and the audio transmitter characteristics of the mobile terminal can be measured using the MT8820C to demodulate the uplink RF signal and measure the level, frequency, and distortion of the demodulated tone signal.

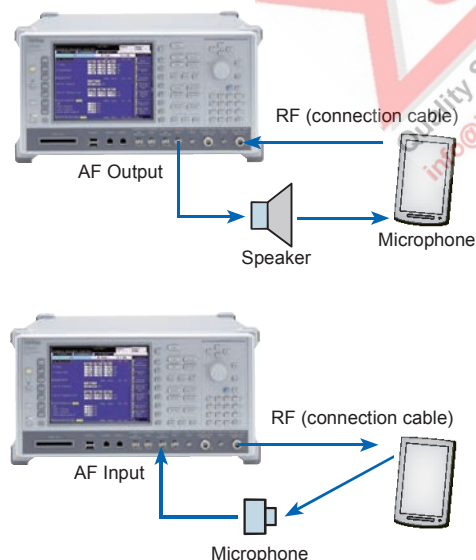


- * Requires MT8820C-011, MX882000C-001, MX882001C-001, MX882002C-001 or MX882007C-001
- * Audio Transmitter and Receiver Measurement supports W-CDMA, GSM, TD-SCDMA
- Audio Transmitter and Receiver Measurement does not support CDMA2000 1X

Refer to the MX882000C, MX882001C, MX882002C and MX882007C catalog for details.

Packet Communication Data Transfer Test

End-to-End Data Transfer Test

Using the External Packet Data Software option supports end-to-end data transfer between a mobile terminal (W-CDMA, HSDPA, GPRS, CDMA2000 1X, CDMA2000 1xEV-DO Rev. 0) and an application server connected to the MT8820C, or a PC client connected to the terminal, and various application tests. The IP data transfer software option supports end-to-end data transfer with an LTE FDD/TDD terminal.

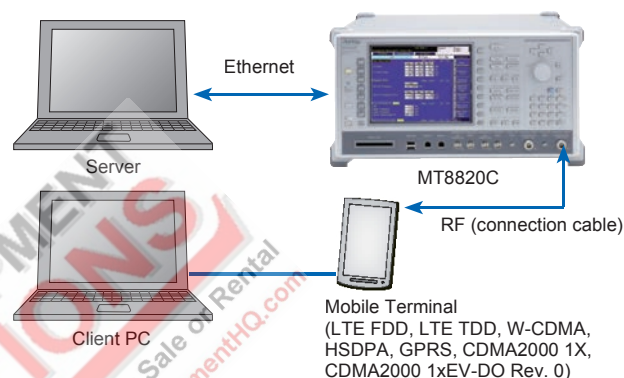


Sample MT8820C connection

LTE-Advanced FDD DL CA plus MIMO

Receiver Measurement

With two MT8820Cs, capable of maximum throughput testing of DL CA 2x2 MIMO PHY layer (Max. throughput = 300 Mbps for UE category 6, 20 MHz bandwidth and 2CCs).

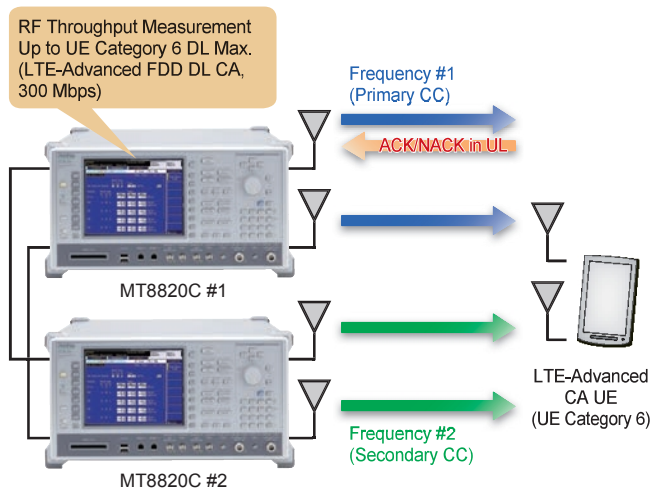

Sample MT8820C connection

- * Packet Communication Data Transfer Test requires either MX882012C-006 (MX882013C-006), MX882050C-002, MX882050-011, MX882050C-002, MX882001C-002, MX882002C-002 or MX882006C-002
- * MIMO Test requires MT8820C 2 set.
- MT8820C #1 requires MT8820C-008, MT8820C-012, MX882012C-011, and MX882012C-021.
- MT8820C #2 requires MT8820C-008, MT8820C-012, and MX882012C-011.


Refer to the MX882012C/13C/42C/43C, MX882000C, MX882001C or MX882002C/MX882006C catalog for details.

Video Phone Test


End-to-End Video Phone Test

The MT8820C supports two-ways tests between W-CDMA (TD-SCDMA) terminals with video functions via the MT8820C Ethernet port.

Two-way video phone tests require either two MT8820C units or one unit with the Parallelphone measurement option.

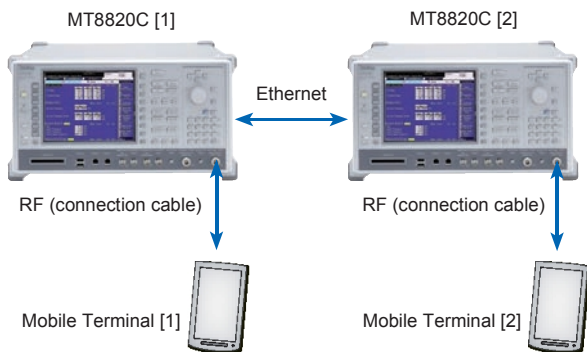

Sample MT8820C connection: when MT8820C is two sets

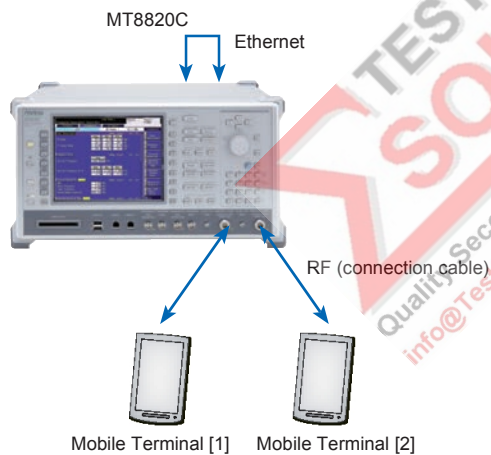

Sample MT8820C connection: when MT8820C is one set (Parallelphone measurement correspondence)

CDMA2000 1X/1xEV-DO (Rev. 0) Synchronous Function

CDMA2000 1X/1xEV-DO (Rev. 0) Hybrid Terminal Function Test


By using the MX882002C and MX882006C with two MT8820C units or one MT8820C unit with the Parallelphone measurement option, the CDMA2000 1X and 1xEV-DO (Rev. 0) forward link signals can be output with synchronized system times, supporting function tests of terminals for both CDMA2000 1X and 1xEV-DO (Rev. 0) systems*

*: This function cannot be used when MX882000C W-CDMA Measurement Software or MX882007C TD-SCDMA Measurement Software is loaded. Please perform unload, when MX882000C or MX882007C is loaded.

*: Installing the MX882006C-011 option supports the mobile terminal connection test with ETAP only.



Sample MT8820C connection: when MT8820C is two sets

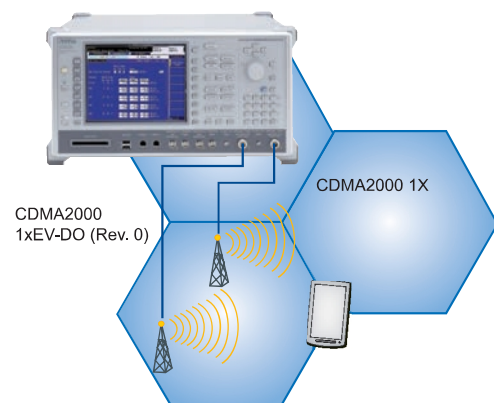

Sample MT8820C connection: when MT8820C is one set (Parallelphone measurement correspondence)

* Requires MX88205xC-003 or MX882007C-003

Refer to the MX882000C and MX882007C catalog for details.


Refer to the MX882002C/MX882006C catalog for details.

Higher Productivity

High Production Efficiency and
Smaller Equipment Footprint using
Parallelphone Measurement

Simultaneous Measurement of Two Mobile Terminals

Installing the Parallelphone Measurement option supports simultaneous measurement of two terminals using the second RF, AF, GPIB, or Ethernet port of a single MT8820C unit.

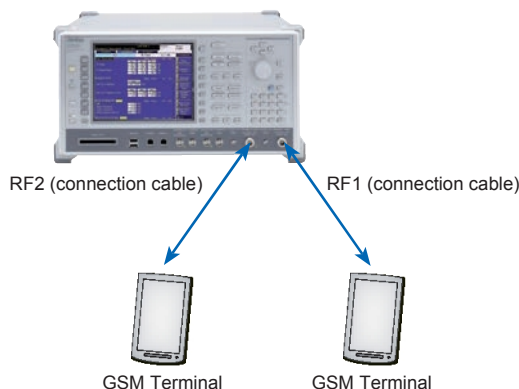

Case of GSM Parallel Phone Measurements

Model	Name	Required number
MT8820C	Radio Communication Analyzer	1
MT8820C-002	TDMA Measurement Hardware	2
MT8820C-012	Parallel Phone Measurement Hardware	1
MX882001C	GSM Measurement Software	1
MX882010C	Parallel Phone Measurement Software	1

Specifications

MX882010C Parallel Phone Measurement Software

Main2 Input/Output Aux2 Output	Identical to Main1 Input/Output and Aux1 Output specified by the MT8820C and the measurement software installed in the MT8820C.
AF2 Input/Output	Identical to AF1 Input and Output specified by the measurement software. These are enabled only when the MT8820C-011 Audio Board is installed.

* The MT8820C-012 Parallel Phone Measurement Hardware requires the MX882010C Parallel Phone Measurement Software as well as installation of the required measurement software and two measurement hardware units.


Supports Multi-system Call Processing Test

Call Processing Test

Call Processing

Connection Test

Various connection tests, such as registration, origination, termination, handover, terminal disconnect, and network disconnect, can be tested using the call processing functionality. Moreover, voice from the mobile terminal can be echoed back while calling to test simple voice communications.

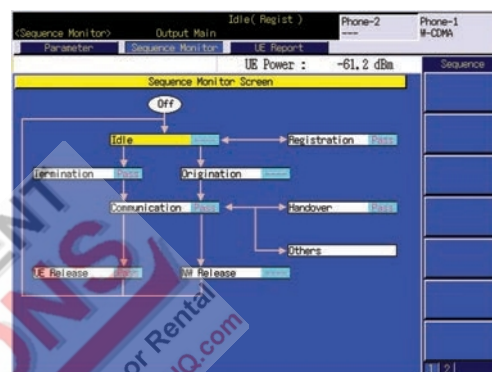

Sequence Monitor (W-CDMA)


Mobile Terminal Report Monitor

The mobile terminal status can be displayed as a periodic report sent by the mobile terminal to the MT8820C. The downlink RF signal level at the mobile receiver can be checked with the Rx level reported from the mobile terminal.




Mobile Terminal Report Monitor (GSM)

Panel Layout

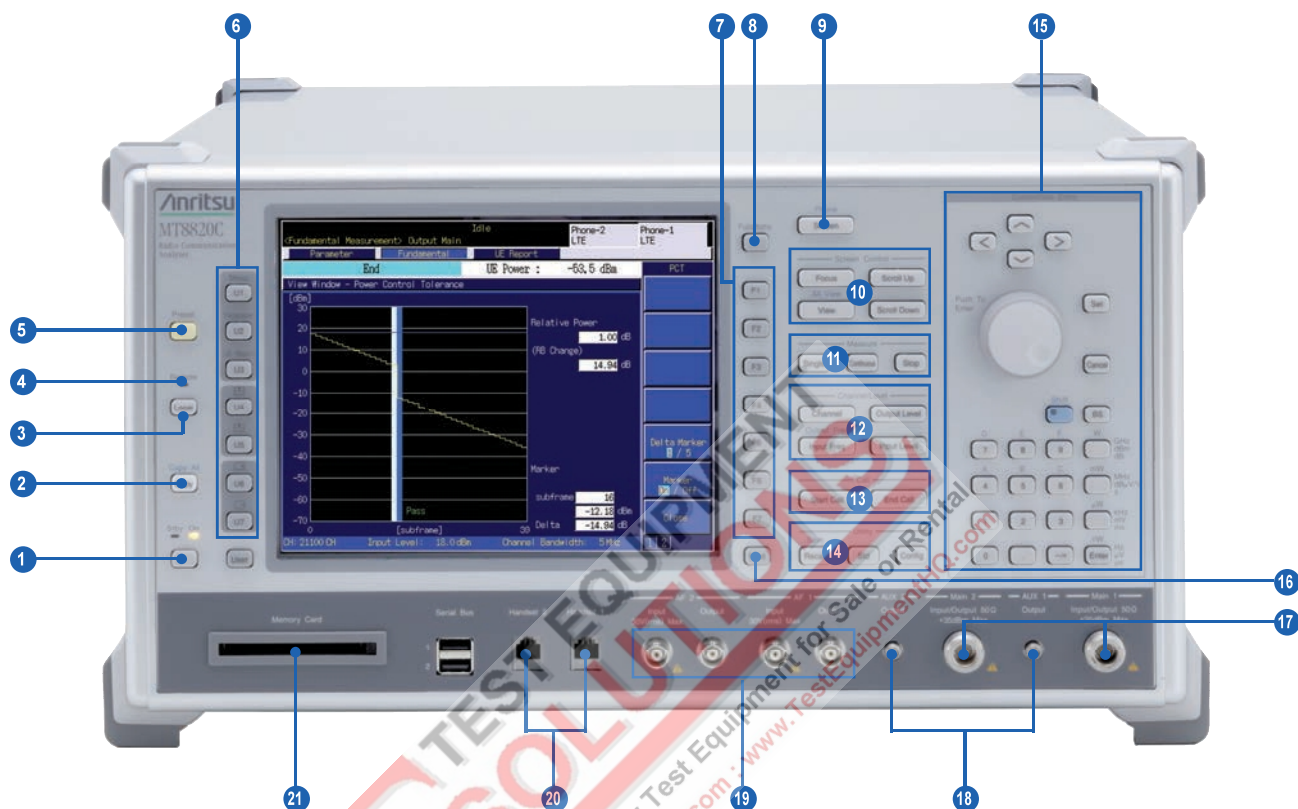

- 1 Power Switch**
Switches mode between power-on and standby
- 2 Copy Key**
Copies screen
- 3 Local Key**
Switches remote control to manual control
- 4 Remote Lamp**
Lit while in remote control mode
- 5 Preset Key**
Starts initializing
- 6 User function keys**
Execute user menu contents displayed in the leftmost area of the screen, when the common window is enabled
- 7 Function Key**
Executes function menu displayed on right of screen
- 8 Functions**
Displays function menu on screen
- 9 Screen Switch Key**
Switches screen
- 10 Screen Control**
Switches display window for manual operation
- 11 Measure**
Starts and stops measurement
- 12 Channel/Level**
Sets channel, frequency, and level
- 13 Call**
Connects and disconnects call
- 14 Utility**
Saves and recalls parameters, and displays configuration
- 15 Cursor/Data Entry**
Moves cursor and sets parameters
- 16 Page Switch Key**
Switches function menu displayed on right of screen
- 17 Main Input/Output Connector**
Outputs RF signal for RF testing mobile terminal (N-type connector)
- 18 AUX Output Connector**
Outputs RF signal for RF testing mobile terminal (SMA connector)
- 19 AF Input/Output Connector**
For audio measurement
- 20 Handset Connector**
For testing end-to-end voice communication between MT8820C and mobile terminal using an Anritsu handset (A0058A/A0013)
- 21 Memory Card Slot**
For saving/recalling measurement parameters and update software to/from PCMCIA-compliant PC-card-type memory card (Type II)

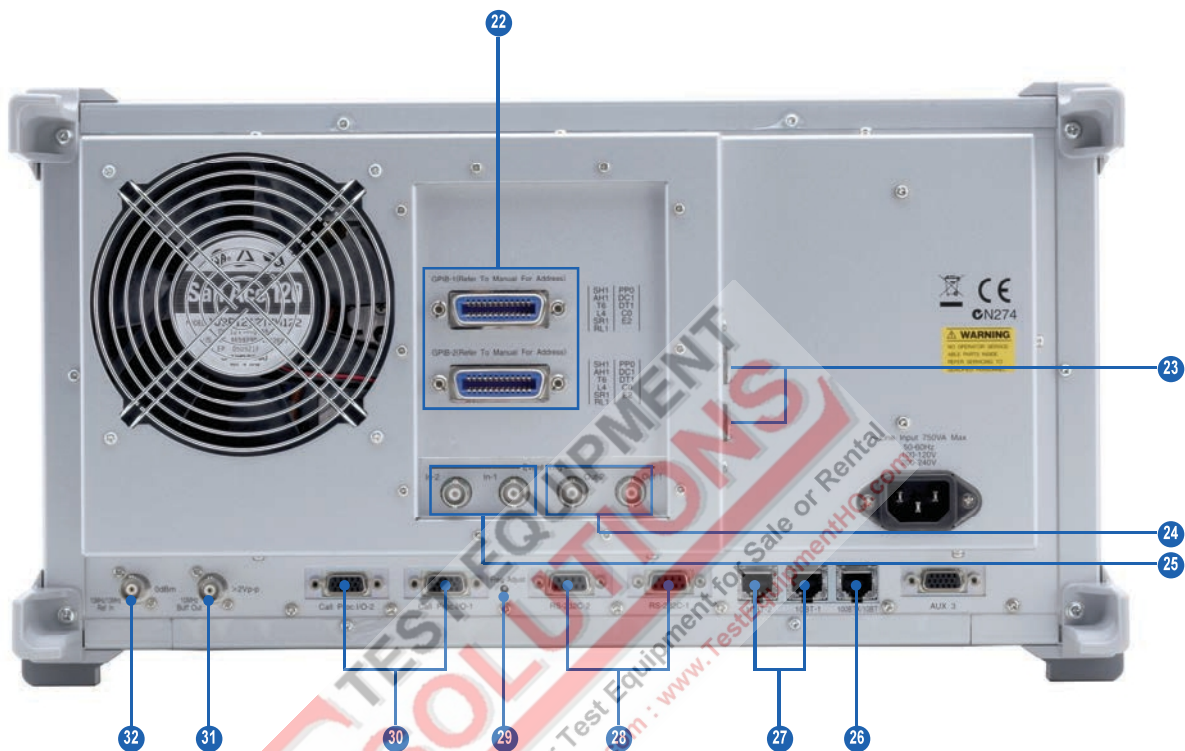

22 GPIB Connector

For remote control of MT8820C

23 1000Base-T/100Base-TX/10Base-T port

Interface for packet and LTE communication tests (for LTE) (enabled when LTE measurement hardware installed in MT8820C)

24 Trigger Output Connector

Outputs event-timing signal to external equipment (BNC connector)

25 Trigger Input Connector

Inputs trigger signal from external equipment to measure uplink signal from mobile equipment by synchronizing (BNC connector)

26 100Base-TX/10Base-T Port

RJ-45 connector for the remote control via Ethernet (100Base-TX/10Base-T)

27 10Base-T Port

Interface for packet and W-CDMA video communication test

28 RS-232C Port

Interface for packet communication test

29 Frequency Adjust

Adjusts frequency of internal reference oscillator

30 Call Processing Input/Output Port

Interface for BER measurement and synchronization

31 Reference Signal Output Connector

Outputs 10-MHz reference signal of MT8820C (BNC connector)

32 Reference Signal Input Connector

Inputs 10/13-MHz reference signal (BNC connector)

Specifications

* Typical values are only for reference and are not guaranteed specifications.

General	Frequency range: 30 MHz to 2.7 GHz 3.4 GHz to 3.8 GHz (with MT8820C-018) Max. input level: +35 dBm (Main) Main I/O Impedance: 50 Ω VSWR: ≤ 1.2 (<1.6 GHz), ≤ 1.25 (1.6 GHz to 2.2 GHz), ≤ 1.3 (>2.2 GHz) Connector: N type AUX output Impedance: 50 Ω VSWR: ≤ 1.3 (SG Output level: ≤ -10 dBm) Connector: SMA type Reference oscillator Frequency: 10 MHz Level: TTL Startup characteristics: $\leq \pm 5 \times 10^{-8}$ (10 min after startup referenced to frequency 24 h after startup) Aging rate: $\leq \pm 2 \times 10^{-8}$/day, $\leq \pm 1 \times 10^{-7}$/year (referenced to frequency 24 h after startup) Temperature characteristics: $\leq \pm 5 \times 10^{-8}$ Connector: BNC type External reference input Frequency: 10 MHz or 13 MHz (± 1 ppm) Level: ≥ 0 dBm Impedance: 50 Ω Connector: BNC type
RF Signal Generator	Frequency Frequency range: 30 MHz to 2.7 GHz (setting range: 400 kHz to 2.7 GHz) 3.4 GHz to 3.8 GHz (with MT8820C-018) Setting resolution: 1 Hz Accuracy: Due to reference oscillator accuracy Output level Level range: -140 to -10 dBm (Main), -130 to 0 dBm (AUX) Resolution: 0.1 dB Accuracy: Main: ± 1.0 dB, ± 0.7 dB typ. (Output frequency: ≥ 50 MHz), ± 1.5 dB (Output frequency: <50 MHz) (-120 to -10 dBm, after calibration, 10° to 40°C) AUX: ± 1.0 dB, ± 0.7 dB typ. (Output frequency: ≥ 50 MHz), ± 1.5 dB (Output frequency: <50 MHz) (-110 to 0 dBm, after calibration, 10° to 40°C) Signal purity Non-harmonic spurious: ≤ -40 dBc (Offset frequency: ≥ 100 kHz) Harmonics: ≤ -25 dBc Uninterrupted level variation Variable range: -30 to 0 dB Setting resolution: 1 dB
Others	Display Color 8.4-inch TFT LCD, 640×480 dots External control GPIO: Control from external host with main unit as device (excluding some functions such as power-on), No external device control Interface functions: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0, E2 Ethernet (100Base-TX/10Base-T): Controlled by an external controller, assuming the MT8820C as a device (except some functions such as power switch etc.). No controller function
Power Supply	100 V(ac) to 120 V(ac)/200 V(ac) to 240 V(ac) (250 V max.), 50 Hz/60 Hz, ≤ 750 VA (with all Options)
Dimensions and Mass	426 (W) $\times$ 221.5 (H) $\times$ 498 (D) mm (excluding projections), ≤ 30 kg (with all Options)
Environmental Conditions	Operating temperature and humidity: 0° to $+50^\circ\text{C}$, $\leq 95\%$ (no condensation) Storage temperature and humidity: -20° to $+60^\circ\text{C}$, $\leq 95\%$ (no condensation) EMC EN61326-1, EN61000-3-2 LVD EN61010-1

Ordering Information

Please specify the model/order number, name and quantity when ordering.

The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
MT8820C	Main frame Radio Communication Analyzer
	Standard accessories
	Power Cord: 1 pc
	CF Card: 1 pc
	PC Card Adapter (For CF card): 1 pc
W3320AE	MT8820C Operation Manual (CD-ROM): 1 pc
MT8820C-017	Options Extended RF Hardware*1
MT8820C-001	W-CDMA Measurement Hardware
MT8820C-002	TDMA Measurement Hardware
MT8820C-003	CDMA2000 Measurement Hardware
MT8820C-005	1xEV-DO Measurement Hardware*2
MT8820C-007	TD-SCDMA Measurement Hardware
MT8820C-008	LTE Measurement Hardware
MT8820C-011	Audio Board
MT8820C-012	Parallel Phone Measurement Hardware
MT8820C-018	Extended RF 3.4 GHz to 3.8 GHz (requires MT8820C-017, MT8820C-119, or MT8820C-120)
MT8820C-043	CDMA2000 Time Offset CAL for GPS SG (requires MT8820C-003 and MX882002C)
MT8820C-101	W-CDMA Measurement Hardware Retrofit
MT8820C-102	TDMA Measurement Hardware Retrofit
MT8820C-103	CDMA2000 Measurement Hardware Retrofit
MT8820C-105	1xEV-DO Measurement Hardware Retrofit*2
MT8820C-107	TD-SCDMA Measurement Hardware Retrofit
MT8820C-108	LTE Measurement Hardware Retrofit
MT8820C-111	Audio Board Retrofit
MT8820C-112	Parallel Phone Measurement Hardware Retrofit
MT8820C-119	Extended RF Hardware for SPM Retrofit
MT8820C-120	Extended RF Hardware for PPM Retrofit
MT8820C-143	CDMA2000 Time Offset CAL for GPS SG Retrofit (requires MT8820C-003 and MX882002C)
MT8820C-177	TD-SCDMA Measurement Retrofit (requires MT8820C-001)
MX882000C	Software options W-CDMA Measurement Software (requires MT8820C-001 and MX88205xC)
MX882000C-001	W-CDMA Voice Codec (requires MT8820C-011 and MX882000C)
MX882000C-011	HSDPA Measurement Software (requires MT8820C-001, MX882000C, and MX882050C)
MX882000C-013	HSDPA High Data Rate (requires MT8820C-001, MX882000C, MX882000C-011, and MX882050C)
MX882000C-021	HSUPA Measurement Software (requires MT8820C-001, MX882000C, MX882000C-011, and MX882050C)
MX882000C-031	HSPA Evolution Measurement Software*3 (requires MT8820C-001, MX882000C, MX882000C-011, MX882000C-021, and MX882050C)
MX882000C-032	DC-HSDPA Measurement Software*3, *4 (requires MT8820C-001 (2 sets), MT8820C-012, MX882000C, MX882000C-011, MX882000C-021, MX882000C-031, MX882010C, and MX882050C)
MX882001C	GSM Measurement Software (requires MT8820C-002)
MX882001C-001	GSM Voice Codec (requires MT8820C-011 and MX882001C)
MX882001C-002	GSM External Packet Data (requires MX882001C)
MX882001C-011	EGPRS Measurement Software (requires MX882001C)
MX882001C-041	GSM High-speed Adjustment (requires MX882001C)
MX882002C	CDMA2000 Measurement Software (requires MT8820C-003)
MX882002C-001	CDMA2000 Voice Codec (requires MT8820C-011 and MX882002C)
MX882002C-002	CDMA2000 External Packet Data (requires MX882002C)
MX882005C	PHS Measurement Software (requires MT8820C-002)
MX882005C-011	Advanced PHS Measurement Software (requires MX882005C)
MX882006C	1xEV-DO Measurement Software (requires MT8820C-003, MT8820C-005, and MX882002C)
MX882006C-002	1xEV-DO External Packet Data (requires MX882006C)
MX882006C-011	1xEV-DO Rev. A Measurement Software (requires MX882006C)

Model/Order No.	Name
MX882007C	TD-SCDMA Measurement Software (requires MT8820C-001 and MT8820C-007)
MX882007C-001	TD-SCDMA Voice Codec (requires MT8820C-011 and MX882007C)
MX882007C-003	TD-SCDMA Video Phone Test (requires MX882007C)
MX882007C-011	TD-SCDMA HSDPA Measurement Software*3 (requires MT8820C-001, MT8820C-007, and MX882007C)
MX882007C-021	TD-SCDMA HSUPA Measurement Software*3 (requires MT8820C-001, MT8820C-007, MX882007C, MX882007C-011)
MX882010C	Parallel Phone Measurement Software*5 [requires MT8820C-012, the two same measurement hardware (2 board/set) and one measurement software]
MX882012C	LTE FDD Measurement Software*3 (requires MT8820C-008)
MX882012C-006	LTE FDD IP Data Transfer*3 (requires MX882012C)
MX882012C-011	LTE FDD 2x2 MIMO DL*3, *6 (requires MT8820C-012 and MX882012C)
MX882012C-016	LTE FDD CS Fallback to W-CDMA/GSM*7 (requires MX882012C)
MX882012C-017	LTE FDD CS Fallback to CDMA2000*7 (requires MX882012C)
MX882012C-021	LTE-Advanced FDD DL CA Measurement Software*3, *8 (requires MT8820C-008 (2 sets), MT8820C-012, MX882010C, and MX882012C)
MX882013C	LTE TDD Measurement Software*3 (requires MT8820C-008)
MX882013C-006	LTE TDD IP Data Transfer*3 (requires MX882013C)
MX882013C-011	LTE TDD 2x2 MIMO DL*3, *6 (requires MT8820C-012 and MX882013C)
MX882013C-016	LTE TDD CS Fallback to W-CDMA/GSM*9 (requires MX882013C)
MX882013C-018	LTE TDD CS Fallback to TD-SCDMA/GSM*9 (requires MX882013C)
MX882020C	Sequence Measurement Software*3 (requires MT8820C-008)
MX882020C-001	W-CDMA Measurement Software*3 (requires MT8820C-008 and MX882020C)
MX882020C-002	GSM Measurement Software*3 (requires MT8820C-008 and MX882020C)
MX882020C-003	CDMA2000 Measurement Software*3 (requires MT8820C-008 and MX882020C)
MX882020C-004	LTE Measurement Software*3 (requires MT8820C-008 and MX882020C)
MX882020C-005	TD-SCDMA Measurement Software*3 (requires MT8820C-008 and MX882020C)
MX882032C	CDMA2000 Measurement Software Lite*3
MX882036C	1xEV-DO Measurement Software Lite*3
MX882036C-011	1xEV-DO Rev. A Measurement Software*3
MX882042C	LTE FDD Measurement Software Lite*3
MX882043C	LTE TDD Measurement Software Lite*3
MX882050C	W-CDMA Call Processing Software*3, *10 (requires MX882000C)
MX882050C-002	W-CDMA External Packet Data*3 (requires MX882050C)
MX882050C-003	W-CDMA Video Phone Test*3 (requires MX882050C)
MX882050C-007	W-CDMA Band XII, XIII, XIV, XIX, XX, XXI*3, *11 (requires MX882050C)
MX882050C-008	W-CDMA Band IX*3 (requires MX882050C)
MX882050C-009	W-CDMA Band IX*3 (requires MX882050C)
MX882050C-011	HSDPA External Packet Data*3 (requires MX882000C-011)
MX882051C	W-CDMA Call Processing Software*3 (requires MX882000C)
MX882051C-002	W-CDMA External Packet Data*3 (requires MX882051C)
MX882051C-003	W-CDMA Video Phone Test*3 (requires MX882051C)
MX882070C	W-CDMA Ciphering Software*3 (requires MX882050C)
MX882071C	W-CDMA Ciphering Software*3 (requires MX882051C)
	Warranty
MT8820C-ES210	2 years Extended Warranty Service
MT8820C-ES310	3 years Extended Warranty Service
MT8820C-ES510	5 years Extended Warranty Service

Model/Order No.	Name
P0019	Application parts
P0035B	Test USIM 001*12
P0035B7	W-CDMA/GSM Test USIM
A0058A	W-CDMA/GSM Test USIM*13
J1195A	Handset
J1249	PP2S Output Cable
	CDMA2000 Cable
	[D-Sub (15 pin, P-type) · D-Sub (15 pin, P-type), used in combination with J1267 (sold separately)]
J1267	CDMA2000 Cross Cable
	[D-Sub (9 pin, P-type) · D-Sub (9 pin, P-type), reverse cable used in combination with J1249 (sold separately)]
J0576B	Coaxial Cord, 1 m (N-P · 5D-2W · N-P)
J0576D	Coaxial Cord, 2 m (N-P · 5D-2W · N-P)
J0127A	Coaxial Cord, 1 m (BNC-P · RG58A/U · BNC-P)
J0127C	Coaxial Cord, 0.5 m (BNC-P · RG58A/U · BNC-P)
J0007	408JE-104 GPIB Cable (1 m)
J0008	GPIB Cable (2 m)
MN8110B	I/O Adapter (for call processing I/O)
B0332	Joint Plate (4 pcs/set)
B0643A	Rack Mount Kit (MT8820C)
B0499	Carrying Case (Hard type) (with protective cover and casters)
B0499B	Carrying Case (Hard type) (with protective cover, without casters)

- *1: MT8820C-017 has been a standard option that MT8820C are shipped with until July 2012 (Simultaneous order is required MT8820C and MT8820C-017).
- *2: The MT8820C-005 hardware supports both IS-856-0 (1xEV-DO Rev. 0) and IS-856-A (1xEV-DO Rev. A) RF measurements.
- *3: For terminal connectivity, contact your Anritsu sales representative.
- *4: MX882000C-032 is required a Parallelphone measurement configuration of W-CDMA HSPA Evolution.
For use MT8820C 2units, contact your Anritsu sales representative.
- *5: The following measurement hardware supports the Parallelphone measurement option: MT8820C-001, MT8820C-002, MT8820C-003, MT8820C-005, MT8820C-007, MT8820C-008.
All the measurement hardware can be installed simultaneously.
- *6: MX882012C-011 is required MT8820C-012.
- *7: The MX882012C-016 (017) LTE FDD CS Fallback to W-CDMA/GSM (CDMA2000) requires a separate MT8820C with the W-CDMA/GSM (CDMA2000) configuration. Contact your Anritsu sales representative for the CS Fallback function test configuration.
- *8: MX882012C-021 is required a Parallelphone measurement configuration of LTE FDD.
For Use MT8820C 2units, contact your Anritsu sales representative.
- *9: The MX882013C-016 (018) LTE TDD CS Fallback to W-CDMA/GSM (TD-SCDMA/GSM) requires a separate MT8820C with the W-CDMA/GSM (TD-SCDMA/GSM) configuration. Contact your Anritsu sales representative for the CS Fallback function test configuration.
- *10: These options preinstall the integrity protection function.
- *11: MX882050C-007 supports W-CDMA Band 12, 13, 14, 19, 20, 21.
- *12: This Test USIM can be worked on only W-CDMA mode.
When the connection of GSM or TD-SCDMA is necessary, P0035B can be applied.
- *13: The P0035B7 MicroSIM is a cut-down P0035B W-CDMA/GSM Test USIM. The P0035B7 Test USIM is a microSIM. It CANNOT be used in a normal size USIM card slot. A commercial SIM adapter CANNOT be used with the P0035B7. If used, it may jam and break in the terminal.

- Parallelphone™ is a registered trademark of Anritsu Corporation.
- CF® card is a registered trademark of SanDisk Corporation in the United States and is licensed to CFA (Compact Flash Association).



Specifications are subject to change without notice.

● United States

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

● United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1 - Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

● Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● Sweden

Anritsu AB

Borgarfjordsgatan 13A, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

● Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● Denmark

Anritsu A/S (Service Assurance)

Anritsu AB (Test & Measurement)

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

● Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

● United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

● India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

● Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

● P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

● P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

● Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

● Korea

Anritsu Corporation, Ltd.

502, 5FL H-Square N B/D, 681
Sampyeong-dong, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

● Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817