



Alltest Instruments, Inc.

500 Central Ave.
Farmingdale, NJ 07727

P: (732) 919-3339
F: (732) 919-3332

alltest.net
sales@alltest.net

The test & measurement equipment you need at the price you want.

Alltest carries the world's largest selection of used/refurbished benchtop test & measurement equipment at 50% the price of new.

Our equipment is guaranteed working, warrantied, and available with certified calibration from our in-house staff of technicians and engineers.

- **10+ full time technicians with over 150 years of specialization**
- **90 day warranty & 5 day right of return on all equipment**
- **1-3 year warranties for new and premium-refurbished equipment**
- **Every unit tested to OEM specifications**
- **Satisfaction guaranteed**

You have plans, we will help you achieve them.
Any project. Any budget.

Get a quote today!

Call (732) 919-3339 or email sales@alltest.net.



Anritsu


MP1632C

Digital Data Analyzer

50 MHz to 3.2 GHz



3.2 Gb/s PPG and ED in One Cabinet
Eye Diagram Measurement and Burst Signal Measurement Supported



Sophisticated Low-Cost 3.2 GHz Digital Data

Core networks and computer networks are becoming increasingly rapid as the volume of data transmitted in this multimedia data is growing.

In addition to the STM-16/OC-48 (2.488 Gbit/s), Fibre channel, Giga-bit Ethernet, etc. are being commercialized. Compact and high performance digital data analyzer are required for production inspections of all kinds of digital transmission systems, optical modules, and logic devices.

MX163201A TEXT to MP1632A/C Pattern Conversion Software,

MX163202A MP165X to MP1632A/C Pattern Conversion Software,

MX163205A Q and Eye Analysis Software, and MX163206A SDH/

SONET Pattern Editor are available as application software.


Analyzer

■ Easy to View, Superb Operability

The MP1632C comes with a large color LCD with touch screen. Moreover, it employs Microsoft® Windows® operating system Version 3.1. In addition to the graphic display of measurement results, customized screens enable one-key and one-parameter operation.

■ High-Quality Pulse Pattern Generator

Programmable patterns of 8 Mbit max, PRBS patterns [(2^7-1) to ($2^{31}-1$), variable mark ratio], and zero substitution patterns can be generated. Moreover, variable cross-point of data output waveform is also supported.

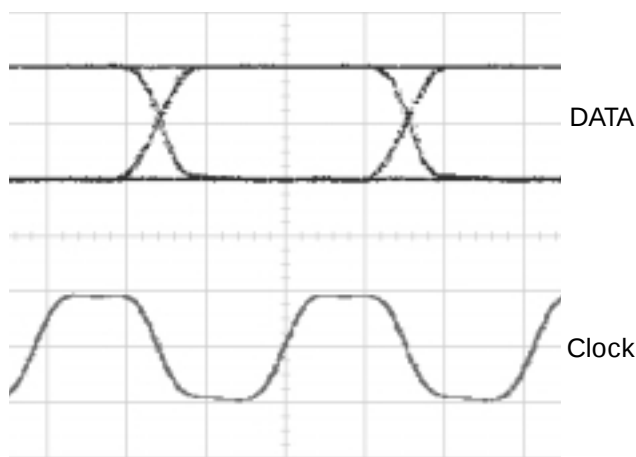

H: 100 ps/div, V: 1 V/div.
MU163220C Output Waveform (3.2 GHz)

■ Error Detector with Many Functions

High input sensitivity (25 mVp-p*) and wide phase margin (250 ps*) performance is provided. The autosearch function enables PRBS pattern search with usual phase and threshold search. Insertion error and omission error can be measured simultaneously.

*Typical values at 3 Gb/s, PRBS $2^{23}-1$

■ Internal synthesizer with High Signal Purity (Option)


Generates highly pure signals with SSB phase noise characteristics of -85 dBc/Hz or less (10 kHz offset).

■ Support of Various Applications


- Testing of SDH/SONET (STM-0, 1, 4, 16/OC-1, 3, 12, 48) devices and modules
- Research and development on WDM components, Fibre channels, Giga-bit Ethernet
- Evaluation of E/O and O/E module, GaAs IC and high-speed ASIC/FPGAs

■ Eye margin measurement for evaluating waveform quality

Phase margin and threshold margin can be measured using various error rate. Eye diagram display is also supported.

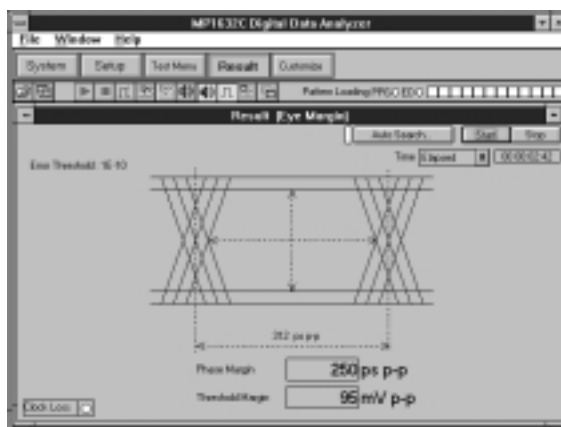


Eye margin

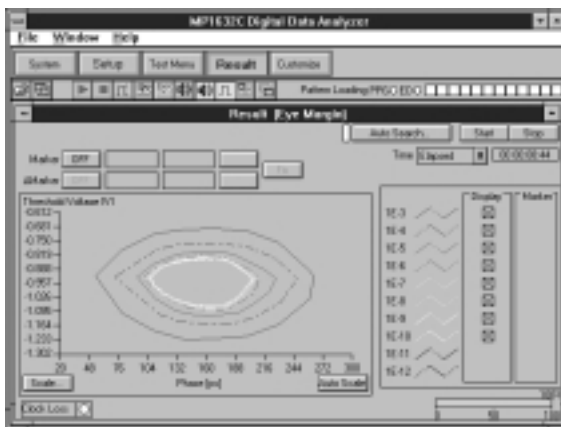

Eye diagram

■ Burst Signal Measurement


It is popular to use optical fiber circulating loop for testing long distance transmission. In this case, data signal is burst signal. Pulse Pattern Generator unit can generate burst signals and Error Detector unit can measure BER of input burst signal.

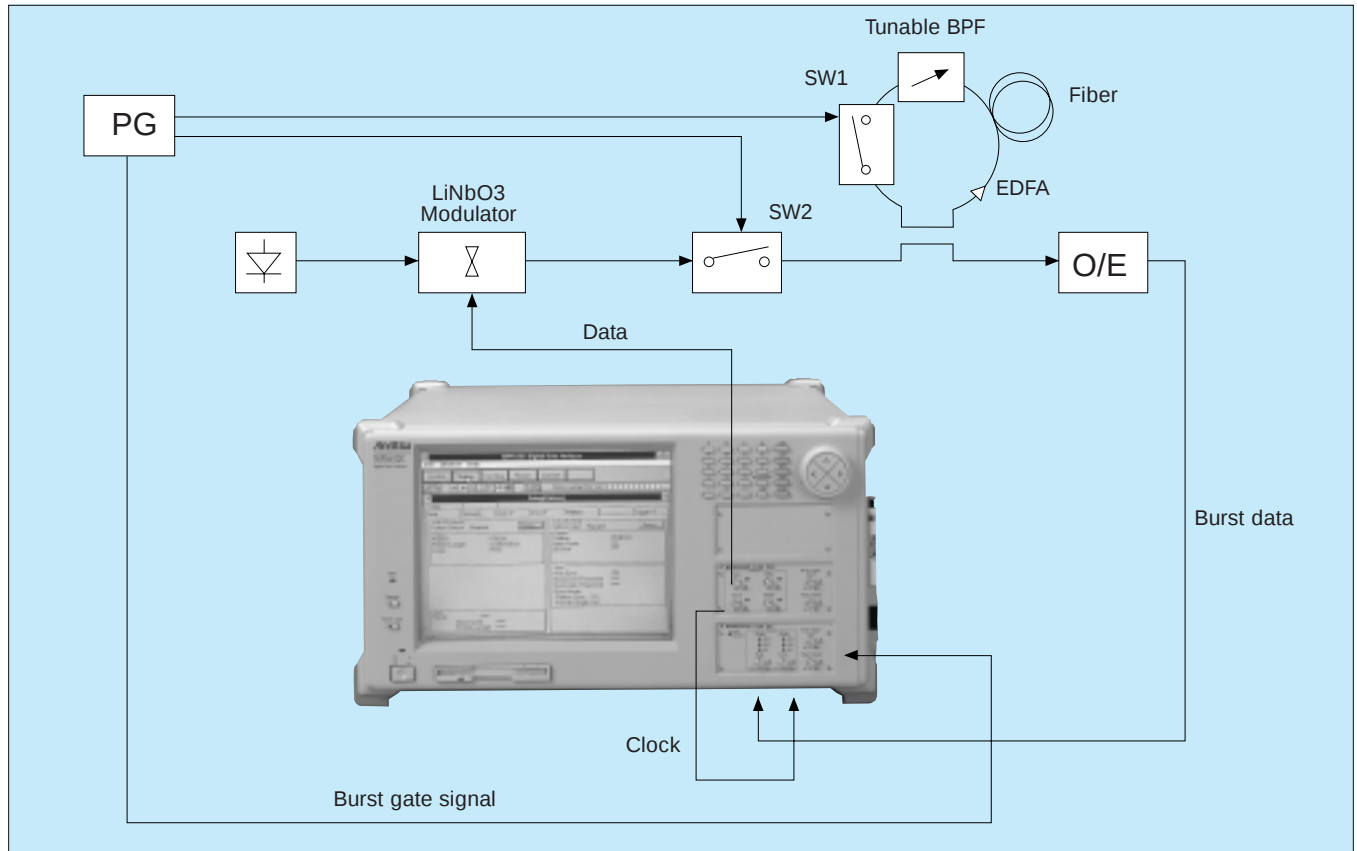

Burst signal measurement for fiber loop test

■ One-Key/One-Parameter Operation using Customized Screens

To make measurement settings simpler, the MP1632C has the convenient one-key/one parameter operation used previously in the Anritsu bit error rate test sets, as well as customized screens.

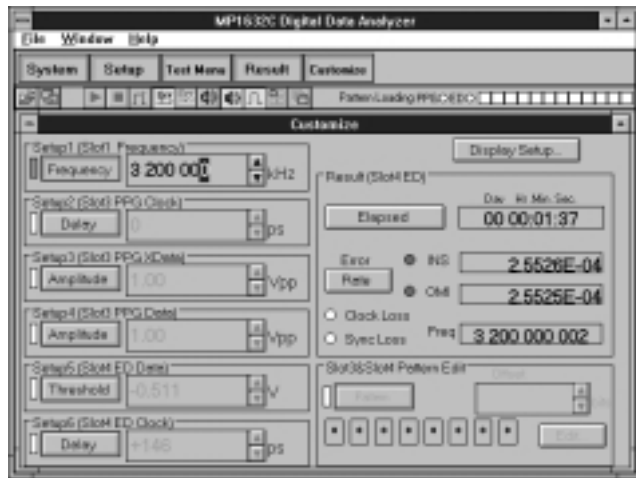


Customized screen

■ Easy-to-Use Interface


Useful setting and pattern data can be saved as a file to either 3.5" FD or the large-capacity internal hard disk. In addition, video-out and printer interfaces for displaying screens and measurement results are provided as standard. Moreover, the standard RS-232C I/F, optional GPIB I/F and Ethernet I/F permit the analyzer to be controlled by a host allowing configuration of advanced measurement systems.

■ Powerful Pattern Editor Function


The MP1632C pulse pattern generator and error detector PRGM patterns can be edited easily using the keyboard, mouse, or cursor keys. There are two editing modes matching the various applications: Time and table. The Time mode puts time on the horizontal axis and displays the pattern as a horizontal line. The table mode displays the pattern as a memory table image using either binary or hexadecimal code.

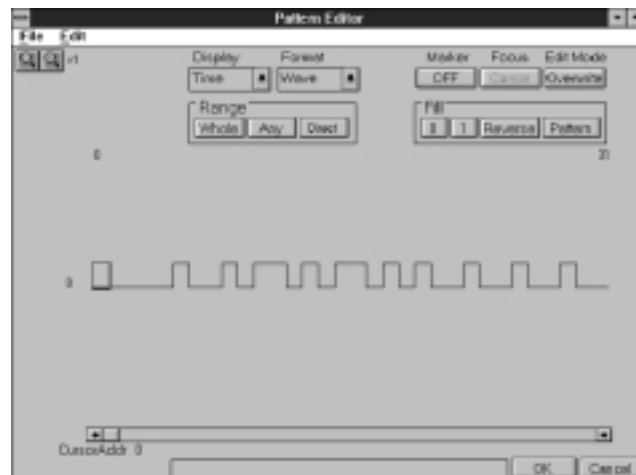

Pattern editor (time mode)

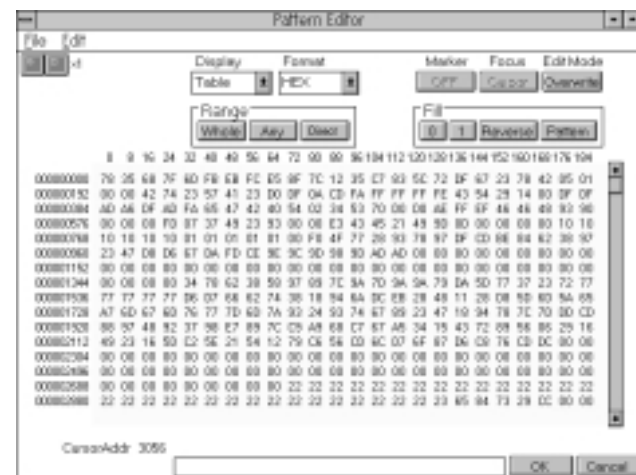

Pattern editor (table mode)



Easy-to-use Large LCD with Touch Panel

The MP1632C can be operated using touch keys, a mouse, a ten-key/rotary encoder, and a

Rotary Encoder Knob

The outer ring of the knob is used to input continuously-variable numeric values for the frequency and output level, etc. The inner part is used as the $\wedge$, $\vee$, $<$, and $>$ functions, and as the cursor key for selecting measurement parameters.

Data Input Keys

These keys are used to input numeric values, alphabetic characters and units. Alphabetic input uses pattern data editing in HEX code.

Large Color LCD with Touch Screen

The analyzer uses the Microsoft® Windows® operating system version 3.1; the hierarchy of measurement parameter levels has been decreased for better usability.



3.5" FDD

This is an MS-DOS format 1.44 MB/740 KB mode disk drive.


3.2G Error Detector


This unit has a burst trigger input.

3.2G Pulse Pattern Generator

Burst trigger output is enabled.

keyboard, thus meeting the needs and preferences of all users.

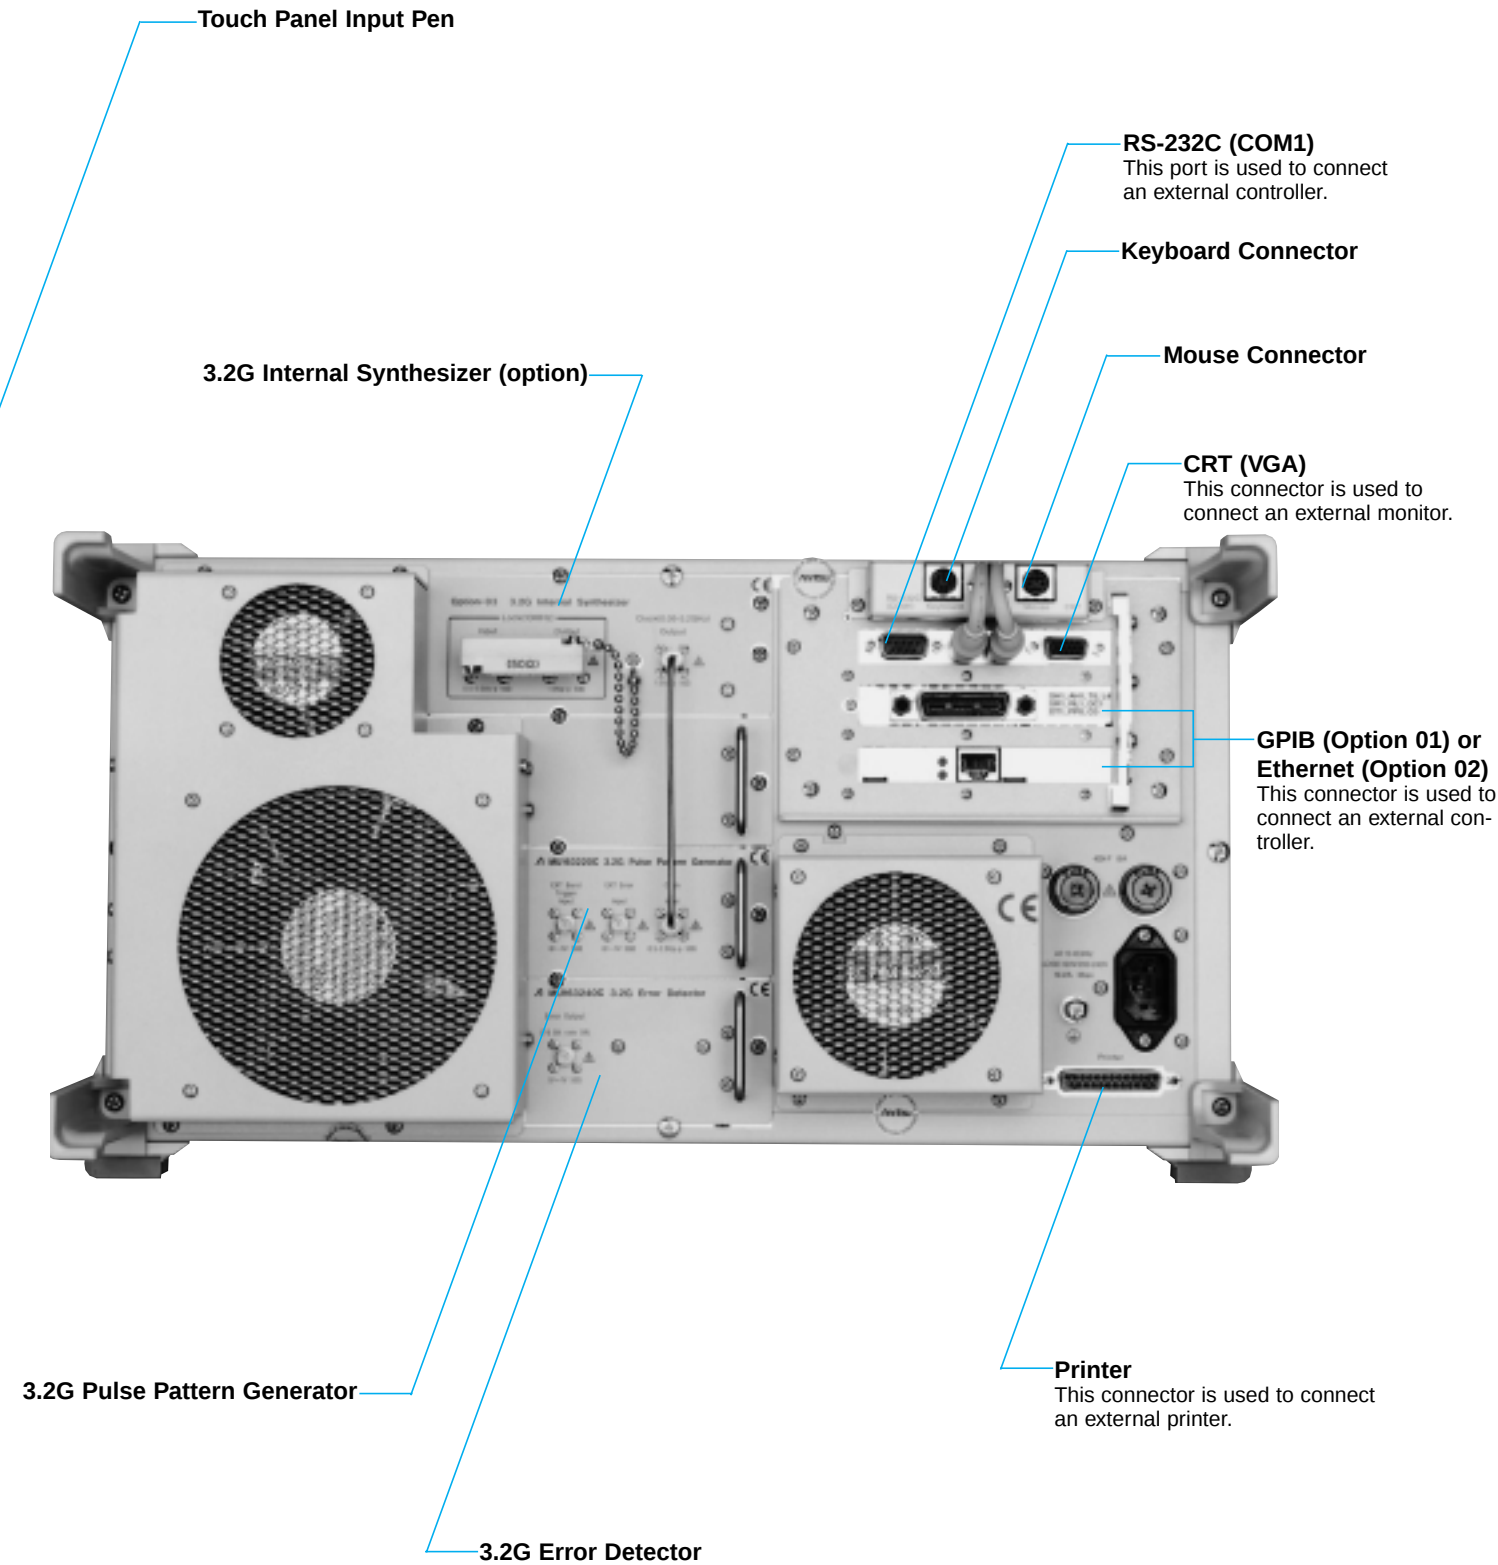



Application Software


■ MX163205A Q/Eye Analysis Software

- Eye diagram and eye margin automatic measurement
- Displays a mask figure for the evaluation on the screen
- Q-factor (ITU-T G.976) automatic measurement



■ MX163206A SDH/SONET Pattern Editor

- Support OC-1 (STM-0) to OC-48c (STM-16c) mapping
- Alarm addition (OOF, LOF, MS-AIS, REI, RDI)
- BIP error addition (B1, B2, B3)
- Support "no frame" pattern



Specifications

●MU163220C 3.2G Pulse Pattern Generator

Operating frequency	10 MHz to 3.2 GHz (50 MHz to 3.2 GHz when using MP1632C-03 3.2G Internal Synthesizer)
External clock input	0.5 to 2 V _{p-p} (<0.5 GHz: square wave, ≥0.5 GHz: square wave or sine wave, 50% duty cycle)
Generation pattern	Pseudo random pattern (PRBS) Pattern length: 2ⁿ-1 (n: 7, 9, 11, 15, 20, 23, 31) Mark ratio: 1/2, 1/4, 1/8, 0/8, 1/2, 3/4, 7/8, 8/8 AND bit shift upon mark ratio setting: 1, 3 bits Data pattern Data length: 2 to 8,388,608 bits Zero substitution pattern Continuous 0 bit length: 1 to (pattern length - 1) bits Pattern length: 2ⁿ (n: 7, 9, 11, 15) Error insertion Error ratio: 10⁻ⁿ (n: 3, 4, 5, 6, 7, 8, 9), single error External error input: Provided
Data output	Number of outputs: 2 (DATA/DATA, independent) Amplitude: 0.5 to 2 V_{p-p} (10 mV steps) Offset voltage V_{OH}: -2 to +2 V (5 mV steps) Display: V_{OH}, V_{TH}, and V_{OL} selectable Rise/fall time: ≤80 ps (10% to 90% of amplitude) Pattern jitter: ≤30 psp-p Waveform distortion: 10% or 0.1 V of amplitude, whichever is greater Load impedance: 50 Ω (with back termination) Connector: SMA DATA/DATA tracking: DATA amplitude and offset voltage can be set to same value as DATA. Crosspoint adjustment function: Provided
Clock output	Number of output: 2 (CLOCK/CLOCK, independent) Amplitude: 0.5 to 2 V_{p-p} (10 mV steps) Offset voltage V_{OH} : -2 to +2 V (5 mV steps) Display: V_{OH}, V_{TH}, and V_{OL} selectable Rise/fall time: ≤80 ps (10% to 90% of amplitude) Load impedance: 50 Ω (with back termination) Connector: SMA Clock delay: -1 to +1 ns (2 ps steps)
External burst trigger input	Input level: 0/-1 V, connector: SMA
Internal burst signal	Burst cycle: 2 μs to 50 ms (1 μs steps) Enable length: 1 μs to 49.999 ms (1 μs steps)
Burst trigger output	Output level: 0/-1 V, connector: SMA
Sync signal output	Number of outputs: 1 (1/8 clock, variable pattern synchronization output selectable) Output level: 0/-1 V Connector: SMA
Operating temperature	+5 to +45°C
Power	≤200 VA
Dimensions and mass	232 (W) x 49 (H) x 449 (D) mm, ≤4.5 kg

●MU163240C 3.2G Error Detector

Operating frequency	10 MHz to 3.2 GHz
Data input	Input waveform: NRZ Input voltage: 0.5 to 4 V_{p-p} Variable threshold voltage: -4 to +4 V (1 mV steps) Termination: Connected to GND, -2 V or +3 V via 50 Ω Connector: SMA
Clock input	Input waveform: Square wave (<0.5 GHz), square wave or sine wave (≥0.5 GHz), duty: 50% Input amplitude: 0.5 to 4 V_{p-p} Variable input delay: -1 to +1 ns (2 ps steps) Polarity inversion: POS/NEG inversion selectable Termination: Connected to GND, -2 V or +3 V via 50 Ω Connector: SMA
Auto search function	Phase, threshold, PRBS pattern (allowed if the mark ratio is between 1/8 and 7/8)

Receive pattern	Pseudo random pattern (PRBS) Pattern length: $2^n - 1$ (n: 7, 9, 11, 15, 20, 23, 31) Marker ratio: 1/2, 1/4, 1/8, 0/8, 1/2, 3/4, 7/8, 8/8 AND bit shift upon marker ratio setting: 1, 3 bits Data pattern Data length: 2 to 8,388,608 bits Zero substitution pattern Continuous 0 bit length: 1 to (pattern length - 1) bits Pattern length: 2^n (n: 7, 9, 11, 15)
Sync mode	Normal, frame
Sync threshold	AUTO or 10^{-n} (n: 2, 3, 4, 5, 6, 7, 8)
Error detection mode	Omission, insertion, total
Measurement items	Error rate: 0.0000×10^{-16} to 1.0000×10^0 Number of errors: 0 to 9.9999×10^{16} Error interval (async): 0 to 9999999 (Interval: 100 ms, 1 s) Error free interval (EFI): 0.0000 to 100.0000% Clock frequency: 0.01 to 3.2 GHz (resolution: 1 Hz, accuracy: 10 ppm $\pm$ 1 kHz)
Eye margin measurement function	Provided
Error performance calculation function	Provided
Measurement channel mask	1 to 8 channels, each channel settable independently
Error output	Number of output: 1 (1/32 bit rate OR error) Output level: 0/-1 V Connector: SMA
Sync signal output	Number of outputs: 1 (switchable among 1/8 clock, fixed pattern sync, sync gain output) Output level: 0/-1 V Connector: SMA
Burst trigger input	Input level: 0/-1 V, connector: SMA
Operating temperature	+5° to +45°C
Power	≤ 250 VA
Dimensions and mass	232 (W) x 54 (H) x 449 (D) mm, ≤ 5 kg

●MP1632C (Main frame)

System environment	OS: Microsoft® Windows® operating system version 3.1 Display: 10.4 inch, color LCD (touch screen), 640 x 480 dots, 256 colors Printer: Parallel port for external printer (D-sub, 25-pins) Keyboard: 101 type (English), PS/2 (mini DIN 6-pin connector) Mouse: Serial, PS/2 (mini DIN, 6-pin connector) FDD: 2 modes (1.44 MB, 740 KB) HDD C drive: ≥ 474 MB (used for system: measurement data, pattern) D drive: ≥ 30 MB (Not accessible to users, interface: IDE)
Remote control	RS-232C (standard), GPIB (option): IEEE488.2, Ethernet (option): 10 Base-T
EMC	EN61326: 1997/A1: 1998(ClassA), EN6100-3-2: 1995/A2: 1998(ClassA), EN61326: 1997/A1: 1998(Annex A)
LVD	EN61010: 1993/A2: 1995(Installation Category II, Pollution degree2)
Power supply	100 to 120 Vac/200 to 240 Vac, 47.5 to 63 Hz, ≤ 150 VA
Operating temperature	+5° to +45°C
Dimensions and mass	426 (W) x 221.5 (H) x 451(D) mm, ≤ 20 kg

●3.2G Internal Synthesizer (Option 03)

Frequency range	50 MHz to 3.2 GHz (1 kHz steps)
Frequency accuracy	± 2 ppm
SSB phase noise	≤ -85 dBc/Hz (10 kHz offset, 1 kHz bandwidth)
Non-harmonic spurious	≤ -60 dBc (limited to spurious 10 kHz or more distant from carrier frequency)
Power	≤ 50 VA
Mass	≤ 5 kg

Microsoft Windows is a registered trademark of Microsoft Corporation in USA and other countries.

●MX163201A TEXT to MP1632A/C Pattern Conversion Software

Required system	Computer: IBM-PC/AT or full compatible, OS: Windows 3.1/95/98, CPU: Pentium 133 MHz or higher, Memory: 32 MB or more, Hard disk space: 25 MB or more Display Resolution: 640 x 480 or more, Display colors: 256 or more FDD: 3.5-inch (1.44 MB)
Text file	A text file describing the program pattern in hex format (maximum number of characters in a line: 32696 bits including spaces and return characters)
MP1632A/ pattern datafile (PTN)	All the MP1632A/C set data and patterns (file format for reading/writing on the MP1632A/C main screen)
MP1632A/C pattern clipfile (PCP)	Only patterns (a file format that can be read or written in the MP1632A/C Pattern Editor)

●MX163202A MP165X to MP1632A/C Pattern Conversion Software

Required system	Computer: IBM-PC/AT or full compatible, OS: Windows 3.1/95/98, CPU: Pentium 133 MHz or higher, Memory: 32 MB or more, Hard disk space: 25 MB or more Display Resolution: 640 x 480 or more, Display colors: 256 or more FDD: 3.5-inch (1.2/1.44 MB)
Input file	MP165X program pattern files: MP165X's reading/writing and edit File name: T.PTN (for pulse pattern generator), R.PTN (for error detector)
Output file	MP1632A/C pattern data file (PTN): All the MP1632A/C set data and patterns (file format for reading/writing on the MP1632A/C main screen) MP1632A/C pattern clip file (PCP): Only patterns (File format that can be read or written in the MP1632A/C's pattern editor.)

Note: Since the FD format of MP165X is 1.2 MB, the PC must read 1.2 MB format FD.


●MX163205A Q and Eye Analysis Software

Required system	Computer: IBM-PC/AT or full compatible, OS: Windows 95/98/NT, CPU: Pentium 166 MHz or higher, Memory: 64 MB or more, Hard disk space: 100 MB or more, GPIO: National Instruments made GPIO interface (PCMCIA-GPIO or AT-GPIO/TNT series boards are recommended.) Display Resolution: 800 x 600 or more, Display colors: 256 or more *If two or more applications are running simultaneously, operation cannot be guaranteed.
Function	Measurement frequency: 1 to 3.2 GHz Measurement patterns: PRGM, PRBS 7, 9, 11, 15, 20, 23, 31 Pattern format: Continuous/burst (To be synchronized within 1 s) Eye margin measurement Measurement resolution (threshold): 1 to 10 mV (1 mV steps), Measurement resolution (phase): 2 to 10 ps (2 ps steps), Measurement rate: E-2 to E-15 Eye diagram measurement Measurement resolution (phase): 2 to 10 ps (2 ps steps) Measurement rate: E-2 to E-15 (actual measurement), E-3 to E-12 (estimate measurement) Display rate: E-2 to E-15 (actual measurement), E-2 to E-4915 (estimate measurement) Mask test judgment rate: E-2 to E-15 Q factor measurement Measurement style: Multiple measurements at fixed phase/phase vs. Q factor measurements Bit error rate range: Upper limit at E-3 to E-5, lower limit at E-7 to E-12 Minimum error count (measurement accuracy): 1, 10, 100, 1000 Vth shift width: Automatic, fixed (1 to 10 mV/1 mV steps)

●MX163206A SDH/SONET Pattern Editor

Required system	Computer: IBM-PC/AT or full compatible, CPU: Pentium 200 MHz or higher, OS: Windows 95/98/NT, Memory: 64 MB or more Display Resolution: 800 x 600 or more; Display colors: 256 or more FDD: 3.5-inch (1.44 MB), Hard disk space: 100 MB or more, GPIO: National Instruments made GPIO interface (PCMCIA-GPIO or AT-GPIO/TNT series boards are recommended.)
Functions	SDH/SONET pattern editor Mapping: STM-N (N = 1, 4c, 12c, 16c), STS-N SPE (N = 1, 3c, 12c, 48c) Pattern edit: Arbitrary editing of program patterns (PRBS pattern can be inserted in the payload.), time indication, table indication/edit Payload: Free format, ALL 0, ALL 1, PRBS 2 n - 1 (n = 7, 9, 11, 15, 20, 20z, 23, 31) Pattern repetition up to the length of all frames CID pattern: Available Frame repetition: Maximum 26 frames Alarm addition: Alarm addition conforming to SDH/SONET Standard *Items: OOF/LOF, MS-AIS (L-AIS), MS-RDI (L-RDI), MS-REI (L-REI), HP-AIS (P-AIS), HP-REI (P-REI), HP-RDI (P-RDI) BIP error addition: Generates parity errors of B1, B2, and B3 B1, B2, and B3 calculation: Available Scramble: Available BIP correction: Available OH editor: Available

Windows is a registered trademark of Microsoft Corporation of the U.S. in the United States and other countries. IBM and AT are registered trademarks of International Business Machines. Pentium is a registered trademark of Intel Corporation. PCMCIA-GPIO and AT-GPIO/TNT are registered trademarks of National Instruments.



Ordering Information

Please specify model/order number, name and quantity when ordering.

Model/Order No.	Name
MP1632C	Main frame Digital Data Analyzer
	Standard accessories
	Power cord (shielded): 1 pc
F0090	Fuse, 8 A: 2 pcs
Z0319A	PS/2 mouse: 1 pc
Z0320	Input pen: 1 pc
Z0396A	Pen holder: 1 pc
Z0393	Application disk*1: 1 set
Z0395	Remote sample disk*1: 1 set
W1859AE	MP1632C operation manual: 1 copy
W1860AE	MP1632C remote control operation manual: 1 copy
B0447B	Dummy unit to shut EXT unit space: 1 pc
	Options
MP1632C-01	GPIOB
MP1632C-02	Ethernet
MP1632C-03	3.2G internal synthesizer (50 MHz to 3.2 GHz)
	Application software
MX163201A	TEXT to MP1632A/C Pattern Conversion Software
MX163202A	MP165X to MP1632A/C Pattern Conversion Software
MX163205A	Q and Eye Analysis Software
MX163206A	SDH/SONET Pattern Editor

*1 Only for MP1632C customer

*2 Units are factory options (not user replaceable).

*3 Not supplied when 3.2G Pulse Pattern Generator purchased as same time

Model/Order No.	Name
	Peripherals
Z0321A	Keyboard (PS/2)
Z0416	3.5 inch head cleaning disk
J0008	GPIOB cable, 2 m
MB24B	Portable test Rack (specified current: 10 A)
B0348	Soft case
B0329D	Front cover(1 MW 5U)
B0333D	Rack mount kit
B0447A	Dummy unit to shut CG unit space
B0447C	Dummy unit to shut PPG unit space
B0447D	Dummy unit to shut ED unit space
Z0398	Ethernet installation disk (for Option 02)
W1529AE	Ethernet operation manual (for Option 02)
J0905A	Semi-rigid cable (for Option 03)
MU163220C	3.2G Pulse Pattern Generator*2
	Standard accessories
J0693A	Coaxial cord (HRM202B · 3D2W · HRM202B), 1 m: 1 pc
J0696A	Coaxial cord (AA-165-500), 0.5 m: 2 pcs
W1857AE	MU163220C/163240C operation manual: 1 copy
Z0306A	Wrist strap: 1 pc
MU163240C	3.2G Error Detector*2
	Standard accessories
J0693A	Coaxial cord (HRM202B · 3D2W · HRM202B), 1 m: 1 pc
J0696A	Coaxial cord (AA-165-500), 0.5 m: 2 pcs
W1857AE	MU163220C/163240C operation manual*3: 1 copy

Anritsu

Specifications are subject to change without notice.

ANRITSU CORPORATION MEASUREMENT SOLUTIONS

5-10-27, Minamiazabu, Minato-ku, Tokyo 106-8570, Japan
Phone: +81-3-3446-1111
Telex: J34372
Fax: +81-3-3442-0235

• U.S.A. ANRITSU COMPANY

North American Region Headquarters
1155 East Collins Blvd., Richardson, Tx 75081, U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

ANRITSU ELECTRONICS LTD.
700 Silver Seven Road, Suite 120, Kanata,
ON K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brasil

ANRITSU ELETRÔNICA LTDA.
Praia de Botafogo 440, Sala 2401 CEP 22250-040,
Rio de Janeiro, RJ, Brasil
Phone: +55-21-5276922
Fax: +55-21-537-1456

• U.K.

ANRITSU LTD.
200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• Germany

ANRITSU GmbH
Grafenberger Allee 54-56, 40237 Düsseldorf, Germany
Phone: +49-211-96855-0
Fax: +49-211-96855-55

• France

ANRITSU S.A.
9, Avenue du Québec Z.A. de Courtabœuf 91951 Les
Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Italy

ANRITSU S.p.A.
Via Elio Vittorini, 129, 00144 Roma EUR, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-24-25

• Sweden

ANRITSU AB
Botvid Center, Fittja Backe 1-3 145 84 Stockholm,
Sweden
Phone: +46-853470700
Fax: +46-853470730

• Spain

ANRITSU ELECTRÓNICA, S.A.
Europa Empresarial Edificio Londres, Planta 1, Oficina
6 C/ Playa de Liencres, 2 28230 Las Rozas. Madrid,
Spain
Phone: +34-91-6404460
Fax: +34-91-6404461

• Singapore

ANRITSU PTE LTD.
10, Hoe Chiang Road #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-6282-2400
Fax: +65-6282-2533

• Hong Kong

ANRITSU COMPANY LTD.
Suite 719, 7/F., Chinachem Golden Plaza, 77 Mody
Road, Tsimshatsui East, Kowloon, Hong Kong, China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Korea

ANRITSU CORPORATION
14F Hyun Juk Bldg. 832-41, Yeoksam-dong,
Kangnam-ku, Seoul, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604~5

• Australia

ANRITSU PTY LTD.
Unit 3/170 Forster Road Mt. Waverley, Victoria, 3149,
Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

ANRITSU COMPANY INC.
6F, 96, Sec. 3, Chien Kou North Rd. Taipei, Taiwan
Phone: +886-2-2515-6050
Fax: +886-2-2509-5519