

- 2" x 1" metal package
- Wide 2:1 input voltage range
9–18, 18–36, 36–75 VDC
- High efficiency up to 92%
- Adjustable output voltage
- Operating temperature range
–40°C to +85°C
- EN 55032 class A (with external components)
- Remote On/Off
- Under voltage lockout
- RoHS compliant
- 3-year product warranty



The TEN 60N series is a family of high performance 60 Watt DC/DC converter modules featuring wide 2:1 input voltage ranges in a six side shielded 2" x 1" metal package with industry standard footprint. Standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. High efficiency across load range and low input current characteristics at no load make these converters the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipment.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEN 60-1211N	9 - 18 VDC (12 VDC nom.)	5 VDC	12'000 mA			90 %
TEN 60-1212N		12 VDC	5'000 mA			90 %
TEN 60-1213N		15 VDC	4'000 mA			91 %
TEN 60-1215N		24 VDC	2'500 mA			92 %
TEN 60-1222N		+12 VDC	2'500 mA	–12 VDC	2'500 mA	90 %
TEN 60-1223N		+15 VDC	2'000 mA	–15 VDC	2'000 mA	90 %
TEN 60-1225N		+24 VDC	1'250 mA	–24 VDC	1'250 mA	91 %
TEN 60-2411N	18 - 36 VDC (24 VDC nom.)	5 VDC	12'000 mA			92 %
TEN 60-2412N		12 VDC	5'000 mA			91 %
TEN 60-2413N		15 VDC	4'000 mA			92 %
TEN 60-2415N		24 VDC	2'500 mA			91 %
TEN 60-2422N		+12 VDC	2'500 mA	–12 VDC	2'500 mA	90 %
TEN 60-2423N		+15 VDC	2'000 mA	–15 VDC	2'000 mA	90 %
TEN 60-2425N		+24 VDC	1'250 mA	–24 VDC	1'250 mA	91 %
TEN 60-4811N	36 - 75 VDC (48 VDC nom.)	5 VDC	12'000 mA			92 %
TEN 60-4812N		12 VDC	5'000 mA			92 %
TEN 60-4813N		15 VDC	4'000 mA			92 %
TEN 60-4815N		24 VDC	2'500 mA			92 %
TEN 60-4822N		+12 VDC	2'500 mA	–12 VDC	2'500 mA	91 %
TEN 60-4823N		+15 VDC	2'000 mA	–15 VDC	2'000 mA	91 %
TEN 60-4825N		+24 VDC	1'250 mA	–24 VDC	1'250 mA	91 %

Options

TEN-HS1	- Optional Heat Sink with Height = 0.22 inch: www.tracopower.com/overview/ten-hs1
TEN-HS8	- Optional Heat Sink with Height = 0.3 inch: www.tracopower.com/overview/ten-hs8
on demand (backorder with MOQ non stocking item)	- Optional Heat Sink with Height = 0.8 inch: www.tracopower.com/overview/ten-hs10 - Optional Heat Sink with Height = 0.5 inch: www.tracopower.com/overview/ten-hs9

Input Specifications

Input Current	- At no load	12 Vin models: 15 mA typ. 24 Vin models: 10 mA typ. 48 Vin models: 10 mA typ.
Surge Voltage		12 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Under Voltage Lockout		12 Vin models: 7 VDC min. / 8 VDC typ. / 8.8 VDC max. 24 Vin models: 15 VDC min. / 16 VDC typ. / 17.5 VDC max. 48 Vin models: 32 VDC min. / 33.5 VDC typ. / 35 VDC max.
Recommended Input Fuse		12 Vin models: 10'000 mA (fast acting) 24 Vin models: 6'300 mA (slow blow) 48 Vin models: 3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-10% to +20% (15 & 24 Vout models) ±10% (other models) (single output models only) (By external trim resistor) See application note: www.tracopower.com/ten60n-adj Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) - Cross Regulation (25% / 100% asym. load)	single output models: 0.2% max. dual output models: 0.2% max. single output models: 0.5% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) dual output models: 5% max.
Ripple and Noise (20 MHz Bandwidth)	- single output - dual output	5 Vout models: 100 mVp-p max. (w/ 10 µF X7R) 12 Vout models: 125 mVp-p max. (w/ 10 µF X7R) 15 Vout models: 125 mVp-p max. (w/ 10 µF X7R) 24 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 12 / -12 Vout models: 125 / 125 mVp-p max. (w/ 10 µF X7R) 15 / -15 Vout models: 125 / 125 mVp-p max. (w/ 10 µF X7R) 24 / -24 Vout models: 200 / 200 mVp-p max. (w/ 4.7 µF X7R)
Capacitive Load	- single output - dual output	5 Vout models: 30'000 µF max. 12 Vout models: 5'850 µF max. 15 Vout models: 3'900 µF max. 24 Vout models: 2'000 µF max. 12 / -12 Vout models: 3'900 / 3'900 µF max. 15 / -15 Vout models: 2'400 / 2'400 µF max. 24 / -24 Vout models: 1'000 / 1'000 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		60 ms typ. (Power On) 60 ms typ. (Remote On)
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		150% typ. of Iout max.
Overvoltage Protection		133% typ. of Vout nom. (15 Vout single models) 125% typ. of Vout nom. (other single models) (By Zener diode)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Transient Response	- Peak Variation	650 mV max. (25% Load Step)
	- Response Time	250 μ s typ. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Certification Documents	www.tracopower.com/ten60n-safety-cert
Energy Source	- Output, acc. to 62368-1	ES1
Power Source	- Output, acc. to 62368-1	PS3
Pollution Degree		PD 2
Over Voltage Category		Not mains connected

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	External filter proposal:	www.tracopower.com/ten60n-emc-filter
EMS (Immunity)		EN 55024 (IT Equipment) EN 55035 (Multimedia)
	- Electrostatic Discharge	Air: EN 61000-4-2, ± 8 kV, perf. criteria A Contact: EN 61000-4-2, ± 6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 2 kV, perf. criteria A
	Ext. input component:	12 Vin models: KY 220 μ F TVS SMDJ58A 24 Vin models: KY 220 μ F TVS SMDJ58A 48 Vin models: KY 220 μ F TVS SMDJ120A
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	Depending on model
	See application note:	www.tracopower.com/ten60n-cc
Over Temperature Protection Switch Off	- Protection Mode	115°C typ.
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote (passive = on)	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	3 mA typ.
	- Remote Pin Input Current	-0.5 to 0.5 mA
Altitude During Operation		5'000 m max.
Switching Frequency		225 - 275 kHz (PWM)
		250 kHz typ. (PWM)
Insulation System		Functional Insulation

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


Isolation Test Voltage	- Input to Output, 60 s	1'600 VDC
	- Input to Case, 60 s	1'600 VDC
	- Output to Case, 60 s	1'600 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'200 pF max.
Reliability	- Calculated MTBF	880'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material		Copper
Base Material		Non-conductive FR4 (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (2 - 3 μm)
Pin Surface Plating		Tin (3 - 5 μm), matte
Housing Type		Metal Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		2" x 1"
Soldering Profile		Lead-Free Wave Soldering 265°C / 10 s max.
Weight		33 g
Thermal Impedance	- Case to Ambient	10.8 K/W typ.
		10.3 K/W typ. (with heatsink TEN-HS1)
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number	f5ef3249-6dd8-439b-be42-7f4d801b347f

Additional Information

Supporting Documents	www.tracopower.com/overview/ten60n
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

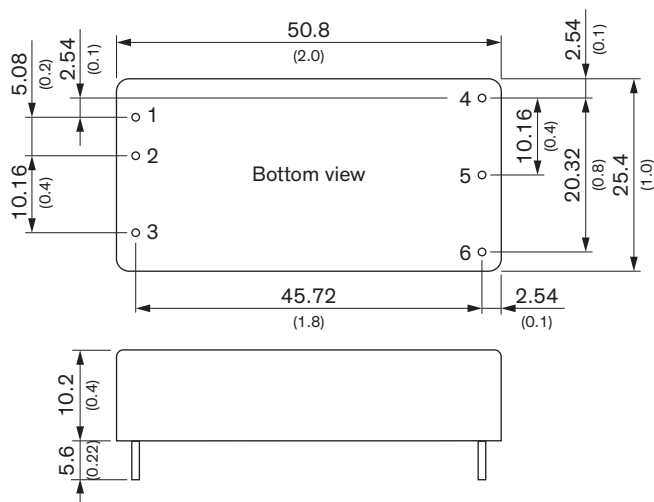


Dimensions in mm (inch)

Tolerances: X.X ±0.5 (X.XX ±0.02)

X.XX ±0.25 (X.XXX ±0.01)

Pin diameter: 1.0 ±0.1 (0.04 ±0.004)

Case tolerances: ±0.5 (±0.02)



Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout